




INTELLIFLO® VARIABLE SPEED PUMP



INSTALLATION AND USER'S GUIDE

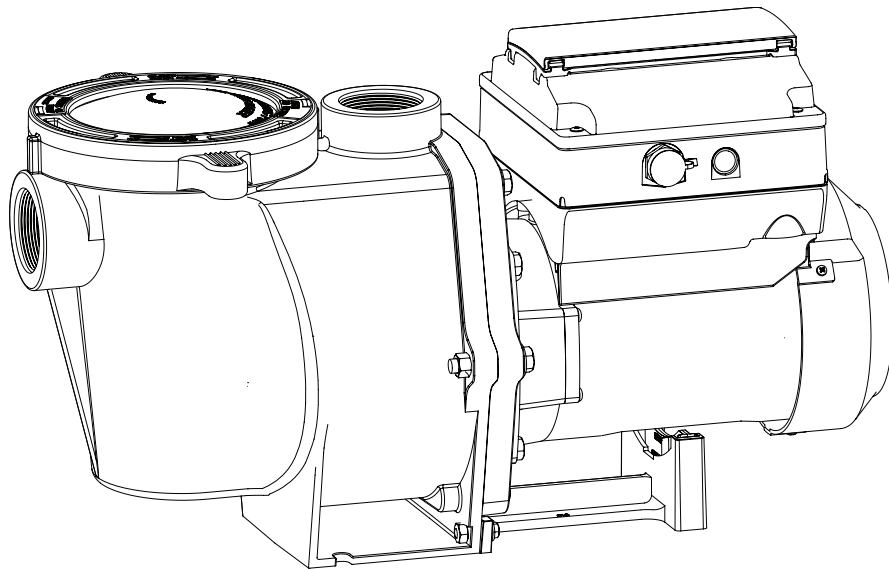

IMPORTANT SAFETY INSTRUCTIONS
READ AND FOLLOW ALL INSTRUCTIONS
SAVE THESE INSTRUCTIONS



CUSTOMER SERVICE / TECHNICAL SUPPORT

If you have questions about ordering Pentair Aquatic Systems replacement parts, and pool products, please contact:

Customer Service and Technical Support, USA

(8 A.M. to 4:30 P.M. — Eastern/Pacific Times)

Phone: (800) 831-7133

Fax: (800) 284-4151

Web site

Visit www.pentairpool.com or www.staritepool.com for information about Pentair products.*

Sanford, North Carolina (8 A.M. to 4:30 P.M. ET)

Phone: (919) 566-8000

Fax: (919) 566-8920

Moorpark, California (8 A.M. to 4:30 P.M. PT)

Phone: (805) 553-5000 (Ext. 5591)

Fax: (805) 553-5515

TABLE OF CONTENTS

Important Pump Warning and Safety Instructions	ii	External Control	12
Pump Overview	1	Features	13
Drive Assembly and Control Panel	1	Time Out	13
External Control	1	Quick Clean/Only High Speed Override Feature	13
Motor Features	1	Priming	13
Drive Features	1	Priming Features	14
Installation	2	Setting Priming Features	15
Location	2	Disabling Priming with an Automation System	15
Piping	2	Thermal Mode	16
Electrical Requirements	2	Connecting to an Automation System	17
Optional Keypad Relocation Kit	2	External Control with IntelliComm	
Fittings and Valves	2	Communication Center	17
Electrical Installation	3	Connecting to EasyTouch and IntelliTouch	
Wiring, Grounding and Bonding	3	Control Systems	17
Operating the Pump	4	Connecting to SunTouch Control System	19
Default Filtration Speed	4	Maintenance	20
Priming the Pump	4	Pump Strainer Basket	20
Using the Operator Control Panel	5	Cleaning the Pump Strainer Basket	20
Stopping and Starting the Pump	6	Winterizing	20
Adjust and Save a Pump Speed	6	Servicing	21
Operating the Pump at Preset Speeds	6	Motor and Drive Care	21
Pump Operating Modes	6	Shaft Seal Replacement	21
Control Panel: Pump Menu Guide	7	Pump Disassembly	21
Pump Settings	8	Pump Reassembly	22
Set Date and Time	8	Drive Assembly Removal and Installation	22
Set AM/PM or 24 Clock	8	Troubleshooting	24
Set Min/Max Speeds	8	Alerts and Warnings	24
Pump Address	8	Troubleshooting Chart	25
Set Screen Contrast	9	Replacement Parts	27
Set Control Panel Language	9	Illustrated Parts List	27
Set Temperature Unit	9	Technical Data	28
Password Protection	9	Pump Dimensions	28
Setting Password	10	Electrical Specifications	28
Setting Speeds 1-8	10	Pump Performance Curves (IntelliFlo i1)	28
Pump Operating Modes	10	Pump Performance Curves (IntelliFlo i2)	29
Set Speeds 1-4 in Manual Mode	11	Pump Performance Curves (3HP IntelliFlo)	29
Set Speeds 1-4 in Egg-Timer Mode	11	Operator Control Panel Quick Reference Guide	30
Set Speeds 1-8 in Schedule Mode	11		

Compatible with IntelliComm® Communication Center and EasyTouch®, IntelliTouch® and SunTouch® Control Systems.

* Translated versions of this manual are available online at / La versión en español de este manual del producto, se puede encontrar en línea a / La version française de ce manuel est disponible à : <http://www.pentairpool.com/subsections/pumps-inground-43.htm>

IMPORTANT PUMP WARNING AND SAFETY INSTRUCTIONS



IMPORTANT NOTICE

This guide provides installation and operation instructions for this pump. Consult Pentair with any questions regarding this equipment.

Attention Installer: This guide contains important information about the installation, operation and safe use of this product. This information should be given to the owner and/or operator of this equipment after installation or left on or near the pump.

Attention User: This manual contains important information that will help you in operating and maintaining this product. Please retain it for future reference.

READ AND FOLLOW ALL INSTRUCTIONS SAVE THESE INSTRUCTIONS



This is the safety alert symbol. When you see this symbol on your system or in this manual, look for one of the following signal words and be alert to the potential for personal injury.

⚠ DANGER

Warns about hazards that can cause death, serious personal injury, or major property damage if ignored.

⚠ WARNING

Warns about hazards that may cause death, serious personal injury, or major property damage if ignored.

⚠ CAUTION

Warns about hazards that may or can cause minor personal injury or property damage if ignored.

NOTE

Indicates special instructions not related to hazards.

Carefully read and follow all safety instructions in this manual and on equipment. Keep safety labels in good condition; replace if missing or damaged.

When installing and using this electrical equipment, basic safety precautions should always be followed, include the following:

⚠ WARNING

Do not permit children to use this product.

⚠ WARNING

RISK OF ELECTRICAL SHOCK. Connect only to a branch circuit protected by a ground-fault circuit-interrupter (GFCI). Contact a qualified electrician if you cannot verify that the circuit is protected by a GFCI.

⚠ WARNING

This unit must be connected only to a supply circuit that is protected by a ground-fault circuit-interrupter (GFCI). Such a GFCI should be provided by the installer and should be tested on a routine basis. To test the GFCI, push the test button. The GFCI should interrupt power. Push the reset button. Power should be restored. If the GFCI fails to operate in this manner, the GFCI is defective. If the GFCI interrupts power to the pump without the test button being pushed, a ground current is flowing, indicating the possibility of an electric shock. Do not use this pump. Disconnect the pump and have the problem corrected by a qualified service representative before using.

⚠ CAUTION

This pump is for use with permanent swimming pools and may also be used with hot tubs and spas if so marked. Do not use with storable pools. A permanently-installed pool is constructed in or on the ground or in a building such that it cannot be readily disassembled for storage. A storable pool is constructed so that it is capable of being readily disassembled for storage and reassembled to its original integrity.

General Warnings

- Never open the inside of the drive motor enclosure. There is a capacitor bank that holds a 230 VAC charge even when there is no power to the unit.
- The pump is not submersible.
- The pump is capable of high flow rates; use caution when installing and programming to limit pumps performance potential with old or questionable equipment.
- Code requirements for electrical connection differ from country to country, state to state, as well as local municipalities. Install equipment in accordance with the National Electrical Code and all applicable local codes and ordinances.
- Before servicing the pump; switch OFF power to the pump by disconnecting the main circuit to the pump.
- This appliance is not intended for use by persons (including children) of reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety.

⚠ DANGER

FAILURE TO FOLLOW ALL INSTRUCTIONS AND WARNINGS CAN RESULT IN SERIOUS BODILY INJURY OR DEATH. **THIS PUMP SHOULD BE INSTALLED AND SERVICED ONLY BY A QUALIFIED POOL SERVICE PROFESSIONAL. INSTALLERS, POOL OPERATORS AND OWNERS MUST READ THESE WARNINGS AND ALL INSTRUCTIONS IN THE OWNER'S MANUAL BEFORE USING THIS PUMP. THESE WARNINGS AND THE OWNER'S MANUAL MUST BE LEFT WITH THE POOL OWNER.**

⚠ DANGER

SUCTION ENTRAPMENT HAZARD: STAY OFF THE MAIN DRAIN AND AWAY FROM ALL SUCTION OUTLETS!



THIS PUMP PRODUCES HIGH LEVELS OF SUCTION AND CREATES A STRONG VACUUM AT THE MAIN DRAIN AT THE BOTTOM OF THE BODY OF WATER. THIS SUCTION IS SO STRONG THAT IT CAN TRAP ADULTS OR CHILDREN UNDER WATER IF THEY COME IN CLOSE PROXIMITY TO A DRAIN OR A LOOSE OR BROKEN DRAIN COVER OR GRATE.

THE USE OF UNAPPROVED COVERS OR ALLOWING USE OF THE POOL OR SPA WHEN COVERS ARE MISSING, CRACKED OR BROKEN CAN RESULT IN BODY OR LIMB ENTRAPMENT, HAIR ENTANGLEMENT, BODY ENTRAPMENT, EVISCERATION AND/OR DEATH.

The suction at a drain or outlet can cause:

Limb Entrapment: When a limb is sucked or inserted into an opening resulting in a mechanical bind or swelling. This hazard is present when a drain cover is missing, broken, loose, cracked or not properly secured.

Hair Entanglement: When the hair tangles or knots in the drain cover, trapping the swimmer underwater. This hazard is present when the flow rating of the cover is too small for the pump or pumps.

Body Entrapment: When a portion of the body is held against the drain cover trapping the swimmer underwater. This hazard is present when the drain cover is missing, broken or the cover flow rating is not high enough for the pump or pumps.

Evisceration/Disembowelment: When a person sits on an open pool (particularly a child wading pool) or spa outlet and suction is applied directly to the intestines, causing severe intestinal damage. This hazard is present when the drain cover is missing, loose, cracked, or not properly secured.

IMPORTANT PUMP WARNING AND SAFETY INSTRUCTIONS

Mechanical Entrapment: When jewelry, swimsuit, hair decorations, finger, toe or knuckle is caught in an opening of an outlet or drain cover. This hazard is present when the drain cover is missing, broken, loose, cracked, or not properly secured.

NOTE: ALL SUCTION PLUMBING MUST BE INSTALLED IN ACCORDANCE WITH THE LATEST NATIONAL AND LOCAL CODES, STANDARDS AND GUIDELINES.



WARNING TO MINIMIZE THE RISK OF INJURY DUE TO SUCTION ENTRAPMENT HAZARD:

- A properly installed and secured ANSI/ASME A112.19.8 approved anti-entrapment suction cover must be used for each drain.
- Each suction cover must be installed at least three (3') feet apart, as measured from the nearest point to nearest point.
- Regularly inspect all covers for cracks, damage and advanced weathering.
- If a cover becomes loose, cracked, damaged, broken or is missing, replace with an appropriate certified cover.
- Replace drain covers as necessary. Drain covers deteriorate over time due to exposure to sunlight and weather.
- Avoid getting hair, limbs or body in close proximity to any suction cover, pool drain or outlet.
- Disable suction outlets or reconfigure into return inlets.



WARNING A clearly labeled emergency shut-off switch for the pump must be in an easily accessible, obvious place.

Make sure users know where it is and how to use it in case of emergency.

The Virginia Graeme Baker (VGB) Pool and Spa Safety Act creates new requirements for owners and operators of commercial swimming pools and spas.

Commercial pools or spas constructed on or after December 19, 2008, shall utilize:

(A) A multiple main drain system without isolation capability with suction outlet covers that meet ASME/ANSI A112.19.8a Suction Fittings for Use in Swimming Pools, Wading Pools, Spas, and Hot Tubs and either:

- (i) A safety vacuum release system (SVRS) meeting ASME/ANSI A112.19.17 Manufactured Safety Vacuum Release systems (SVRS) for Residential and Commercial Swimming Pool, Spa, Hot Tub, and Wading Pool Suction Systems and/or ASTM F2387 Standard Specification for Manufactured Safety Vacuum Release Systems (SVRS) for Swimming pools, Spas and Hot Tubs or
- (ii) A properly designed and tested suction-limiting vent system or
- (iii) An automatic pump shut-off system.

Commercial pools and spas constructed prior to December 19, 2008, with a single submerged suction outlet shall use a suction outlet cover that meets ASME/ANSI A112.19.8a and either:

- (A) A SVRS meeting ASME/ANSI A112.19.17 and/or ASTM F2387, or
- (B) A properly designed and tested suction-limiting vent system, or
- (C) An automatic pump shut-off system, or
- (D) Disabled submerged outlets, or
- (E) Suction outlets shall be reconfigured into return inlets.

For Installation of Electrical Controls at Equipment Pad (ON/OFF Switches, Timers and Automation Load Center)



CAUTION Install all electrical controls at equipment pad, such as on/off switches, timers, and control systems, etc. to allow the operation (startup, shut-down, or servicing) of any pump or filter so the user does not place any portion of his/her body over or near the pump strainer lid, filter lid or valve closures. This installation should allow the user enough space to stand clear of the filter and pump during system start-up, shut down or servicing of the system filter.



HAZARDOUS PRESSURE: STAND CLEAR OF PUMP AND FILTER DURING START UP



Circulation systems operate under high pressure. When any part of the circulating system (i.e. locking ring, pump, filter, valves, etc.) is serviced, air can enter the system and become pressurized.

Pressurized air can cause the pump housing cover, filter lid, and valves to violently separate which can result in severe personal injury or death. Filter tank lid and strainer cover must be properly secured to prevent violent separation. Stand clear of all circulation system equipment when turning on or starting up pump.

Before servicing equipment, make note of the filter pressure. Be sure that all controls are set to ensure the system cannot inadvertently start during service. Turn off all power to the pump. **IMPORTANT: Place filter manual air relief valve in the open position and wait for all pressure in the system to be relieved.**

Before starting the system, fully open the manual air relief valve and place all system valves in the "open" position to allow water to flow freely from the tank and back to the tank. Stand clear of all equipment and start the pump.

IMPORTANT: Do not close filter manual air relief valve until all pressure has been discharged from the valve and a steady stream of water appears. Observe filter pressure gauge and be sure it is not higher than the pre-service condition.

General Installation Information

- All work must be performed by a qualified service professional, and must conform to all national, state, and local codes.
- Install to provide drainage of compartment for electrical components.
- These instructions contain information for a variety of pump models and therefore some instructions may not apply to a specific model. All models are intended for use in swimming pool applications. The pump will function correctly only if it is properly sized to the specific application and properly installed.



WARNING Pumps improperly sized or installed or used in applications other than for which the pump was intended can result in severe personal injury or death. These risks may include but not be limited to electric shock, fire, flooding, suction entrapment or severe injury or property damage caused by a structural failure of the pump or other system component.



WARNING The pump can produce high levels of suction within the suction side of the plumbing system. These high levels of suction can pose a risk if a person comes within the close proximity of the suction openings. A person can be seriously injured by this high level of vacuum or may become trapped and drown. It is absolutely critical that the suction plumbing be installed in accordance with the latest national and local codes for swimming pools.

Warnings and safety instructions for Pentair Aquatic Systems pumps and other related products are available at:
<http://www.pentairpool.com/pool-owner/safety-warnings/> or call (800) 831-7133 for additional free copies of these instructions.

Please refer to <http://www.pentairpool.com/pool-owner/safetywarnings/> for warning and safety instructions related to the this product.

SAVE THESE INSTRUCTIONS

PUMP OVERVIEW

The IntelliFlo® Variable Speed Pump can be molded in a variety of materials for a variety of applications. The pump is designed for long life and energy conservation for a variety of inground pools.

- The pump can operate from 450 RPM to 3450 RPM with four preset speeds of 750, 1500, 2350 and 3110 RPM
- The pump can be adjusted from the control panel to run at any speed between 450 RPM to 3450 RPM for different applications
- Up to 8 programmable speeds
- Pump control panel alarm LED and error messages warn the user against under and over voltage, high temperature, over current and freezing
- Communicates with EasyTouch, IntelliTouch or SunTouch control systems or an IntelliComm communication center via a two-wire RS-485 cable connection
- Programmable priming mode with automatic detection of prime for easy start-up
- Jet action spas
- UL/CUL/NSF

The IntelliFlo pump drive is designed to produce the motor's rotational speed by controlling the frequency of the supplied current. It also protects the motor and pump from operating outside of their intended operating parameters.


The control panel can be mounted on the pump in four different directions in order to provide the user the best access. The control panel can also be mounted in a more convenient location with the help of the keypad relocation kit (P/N 356904Z).

IntelliTouch®, EasyTouch®, SunTouch® Control Systems and IntelliComm® Communication Centers can remotely control the IntelliFlo pump. The pump's communications address and other functions are accessible from the pump's control panel.

- RS-485 communication cable included
- IntelliTouch systems control 8 IntelliFlo pumps using 8 speeds per pump.
- EasyTouch systems control 2 IntelliFlo pumps using 8 speeds per pump.
- SunTouch systems control one IntelliFlo pump using 8 speeds.
- IntelliComm systems control one IntelliFlo pump using the 4 External Control programs.

- Permanent Magnet Synchronous Motor (PMSM)
- Superior speed control
- Operates at lower temperatures due to high efficiency
- Designed to withstand outdoor environment
- Totally Enclosed Fan Cooled (TEFC) Motor
- 56 Square Flange
- Low noise

- Active Power Factor Correction
- UL 60730 Compliant
- Rotatable Keypad
- Easy Overhead Wiring
- High Drift Limit

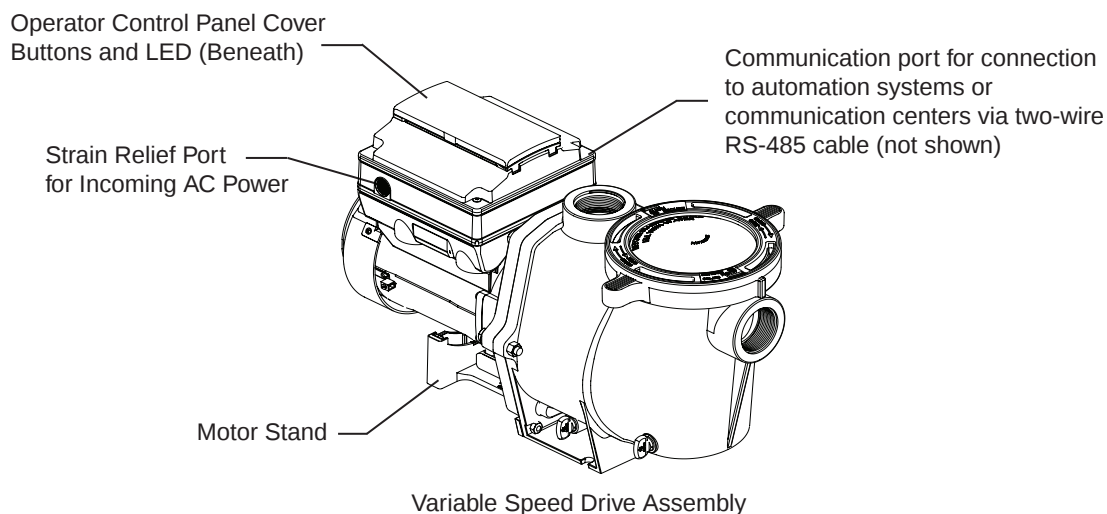

INSTALLATION

IntelliFlo® Variable Speed Pump. Refer to on pages ii - iii for additional installation and safety information.

Do not install this pump within an outer enclosure or beneath the skirt of a hot tub or spa unless marked accordingly.

Ensure that the pump is mechanically secured to the equipment pad.

1. Install the pump as close to the pool or spa as possible. Direct suction piping returns.
2. Install a minimum of 5 feet (1.52 meters) from the inside wall of the pool and spa. Canadian installations require a minimum of 9.8 feet (3 meters) from pool water level.
3. Install the pump a minimum of 3 feet (.9 meters) from the heater outlet.
4. Do not install the pump more than 10 feet (3.1 meters) above the water level.
5. Install the pump in a well ventilated location protected from excessive moisture (i.e., rain gutter downspouts, sprinklers, etc.)
6. Install the pump with a rear clearance of at least 3 inches (76.2 mm) so that the motor can be removed easily for maintenance and repair. See

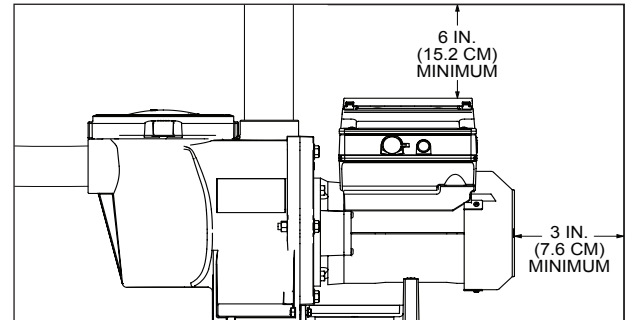


Figure 1: Pump Rear and Overhead Clearance

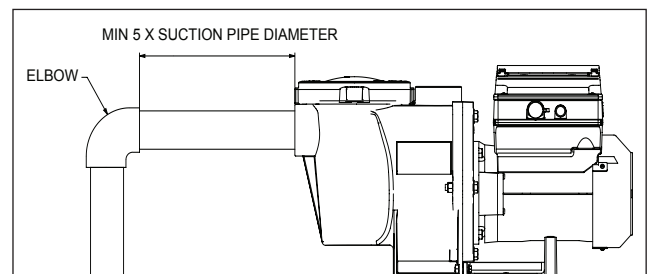


Figure 2: Recommended Piping

1. For improved pool plumbing, it is recommended to use a male adaptor, use thread sealant.
2. Piping on the suction side of the pump should be the same or larger than the return line diameter.
3. Plumbing on the suction side of the pump should be as short as possible.
4. For most installations Pentair recommends installing a valve on both the pump suction and return lines so that the pump can be isolated during routine maintenance. However, it is recommended that a valve, elbow or tee installed in the suction line should be no closer to the front of the pump than

A 2 inch pipe requires a 10 inch (254 mm) straight run in front of the suction inlet of the pump). This will help the pump prime faster and last longer.

DO NOT install 90° elbows directly into the pump inlet or outlet.

Install all equipment in accordance with the National Electrical Code and all applicable local codes and ordinances.

wiring in accordance with the wiring rules.

In special cases when the user lacks easy or convenient access to the IntelliFlo® Variable Speed Pump, a Keypad Relocation Kit (P/N 356904Z [Almond] or P/N 356905Z [Black]) may be purchased from your local pool equipment supplier. This kit allows the user to remove the keypad cover from the top of the drive and mount the keypad in a fixed location with better access.

For installation instructions refer to the provided with the kit.

1. Do not install 90° elbows directly into pump inlet.
2. Flooded suction systems should have gate valves installed on suction and discharge pipes for maintenance, however, the suction gate valve pipe diameter as described in this section.
3. Use a check valve in the discharge line when using this pump for any application where there is
4. Be sure to install check valves when plumbing in parallel with another pump. This helps prevent reverse rotation of the impeller and motor.

⚠ WARNING



> I T >VP obf k p q ^ i i q e b a o f s b i f a l k q l q e b « b i a t f o f k d ` l j m ^ o q j b k q t e b k i b ^ s f k d q e b m r j m r k p r m b o s f p b a a r o f k d servicing. This will prevent foreign matter (i.e. rainwater, dust, etc.) from accumulating in the drive.


When connecting the pump to an automation system (IntelliTouch®, EasyTouch®, SunTouch® Control Systems and IntelliComm® Communication Center), continuous power must be supplied to the pump by connecting it directly to the circuit breaker. When using an automation system, be sure that no other lights or appliances are on the same circuit.

1. Be sure all electrical breakers and switches are turned off before wiring motor.

⚠ WARNING

2. Be sure that the supply voltage meets the requirements listed on the motor nameplate. If these requirements are not met, permanent motor damage may occur.
3. For wiring sizes and general guidelines for proper bib` q o f ` ^ i f k p q ^ i i ^ q f l k) m i b ^ p b c l i i l t q e b p m b ` f « ` ^ q f l k p a b « k b a f k q e b K ^ q f l k ^ i B i b ` q o f ` @ l a b ^ k a ^ k v i l ` ^ i codes as required.
4. Use strain relief and be sure all electrical connections are clean and tight.
5. Cut the wires to the appropriate length so they do not overlap or touch when connected.
6. Reinstall the keypad cover after wiring the pump by plugging the cover back into the drive wiring connection and re-seating the keypad cover in the desired orientation with the four (4) corner screws.

Ensure that the keypad cable is not pinched between the drive and keypad cover during re-seating.

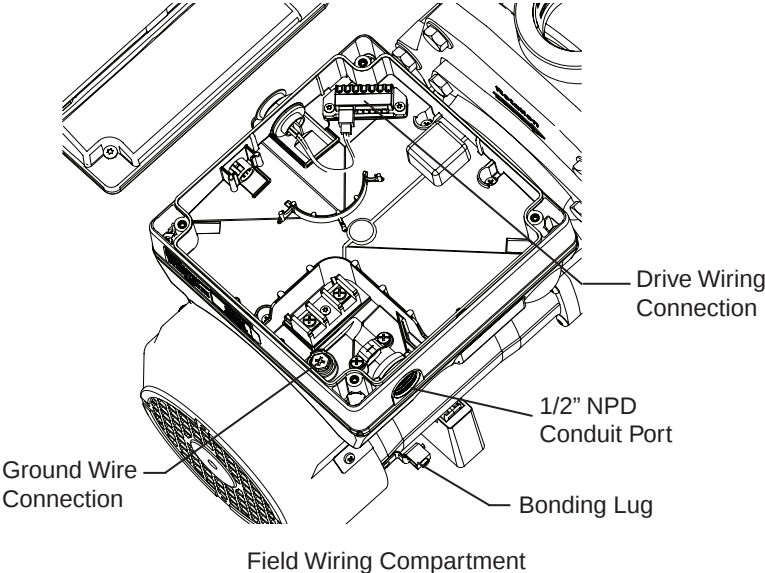

1. Permanently ground the motor using the green ground screw, as shown below. Use the correct wire size and q v m b p m b ` f « b a \_ v K ^ q f l k ^ i B i b ` q o f ` ^ i @ l a b + ? b p r o b the ground wire is connected to an electrical service ground.
2. The pump should be permanently connected to either a circuit breaker, 2-pole timer or 2-pole relay.

If AC power is supplied by a GFCI circuit breaker, the pump should be wired on its own independent circuit

1. Bond the motor to the structure in accordance with the National Electrical Code. Use a solid copper bonding conductor not smaller than 8 AWG. For Canadian installations, a 6 AWG or larger solid copper bonding conductor is required. Run a wire from the external bonding screw or lug to the bonding structure.
2. Connect the wire from the accessible bonding lug on the motor to all metal parts of the swimming pool, spa, or hot tub structure and to all electrical equipment, metal conduit, and metal piping within 5 feet (1.52 meters) of the inside walls of the swimming pool, spa, or hot tub. Run a wire from the external bonding screw or lug to the bonding structure.

When the pump is started and stopped by removing power with a relay or timer, a two-pole device should be used to apply and remove power to both POWER LINE TERMINALS.

OPERATING THE PUMP


CAUTION

Before starting the pump, make sure the pump is properly primed. If the pump does not prime, check your priming settings on the control panel or see the “Troubleshooting” section on pages 24-26.

Follow the steps below to prime the pump for start up:

1. Press **STOP** to stop the pump. Disconnect the pump main power supply and communication cable.
2. Close all valves in suction and discharge pipes. Relieve all pressure from the system.
3. Remove the pump lid and locking ring.
4. Fill the pump strainer pot with water.
5. Reassemble the pump lid and locking ring onto the strainer basket. The pump is now ready to prime.
6. Open all valves in suction and discharge pipes.
7. Lock the pump lid and locking ring and stand clear of the pump.
8. Connect power to the pump. Be sure green power light is on.
9. Press **START** to start the pump. The pump will enter into priming mode (if enabled) and speed up to the maximum speed set in the pump menu settings.
10. When the pump has started, close the valve. The system should now be free of air and recirculating water to and from the pool.
11. Do not allow your pump to run longer than 30 seconds. If the pump does not prime, check your priming settings on the control panel or see the “Troubleshooting” section on pages 24-26.

CAUTION

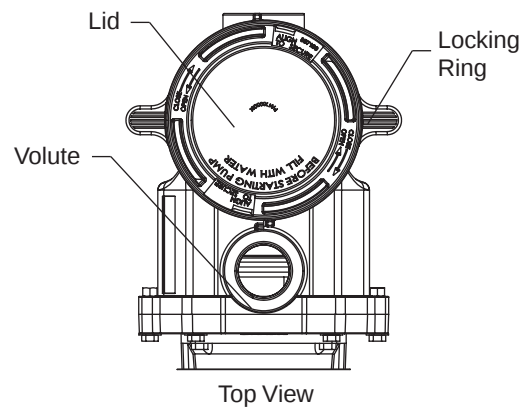

The default priming setting is **ENABLED**. The pump also allows you to set the following from the operator control panel:

Priming speed
Priming range (1-10)
Priming delay

CAUTION

CAUTION

Use the operator control panel to start and stop the IntelliFlo® Variable Speed Pump, program, set, and change speeds (RPM), and access pump features and settings.

- Press to select Speed 1 (750 RPM). LED on indicates Speed 1 is active.
- Press to select Speed 2 (1500 RPM). LED on indicates Speed 2 is active.
- Press to select Speed 3 (2350 RPM). LED on indicates Speed 3 is active.
- Press to select Speed 4 (3110 RPM). LED on indicates Speed 4 is active.
- Goes one step back in menu; exits without saving current setting.
- Saves current menu item setting. When a parameter has been adjusted the "Save?" icon will be displayed.
- Accesses the menu items when and if the pump is stopped.
- Press to select the currently displayed option on the screen.
- - Move one level up in the menu or increase a digit when editing a setting.
 - Move one level down in the menu or decrease a digit when editing a setting.
 - Move cursor left one digit when editing a setting.
 - Move cursor right one digit when editing a setting.
- Pump increases to a higher RPM (for vacuuming, cleaning, adding chemicals, etc.). LED light is on when active.
- Allow the pump to remain in a stopped state for a set period of time before resuming normal operation. LED is on when active.
- To start or stop the pump. When LED is on, the pump is running or in a mode to start automatically.
- Reset alarm or alert.



Green light when pump is powered on.





On if warning condition is present.



Red LED on if alarm condition occurs.

- - Key icon indicates password protection mode is active. If password protect is not enabled, no key icon is displayed. Also shows current time of day. Active cursors display when arrow key input is available.
 - Displays current pump speed (RPM).
 - Countdown time and watts
 - Current pump status and current feature. "Save?" will display on this line when a parameter adjustment can be saved.

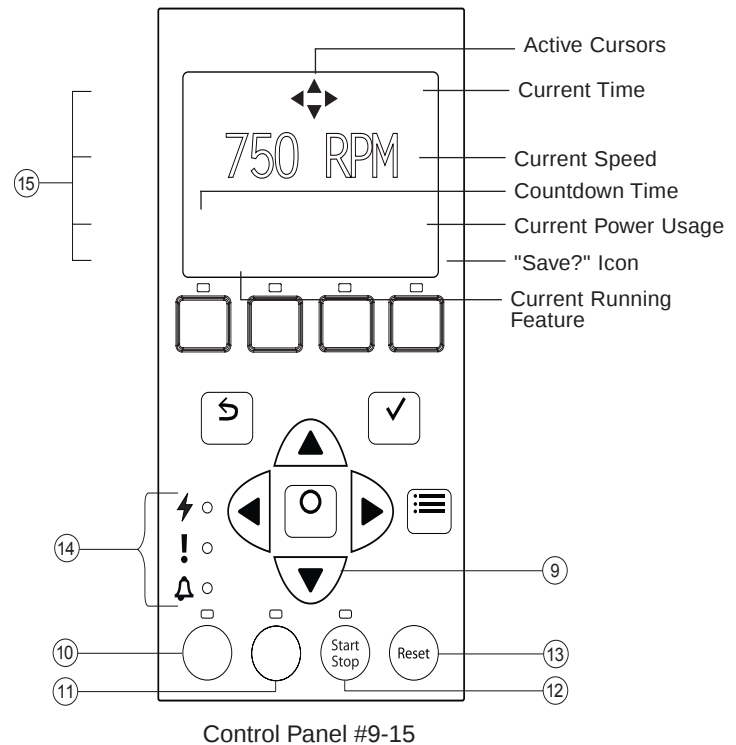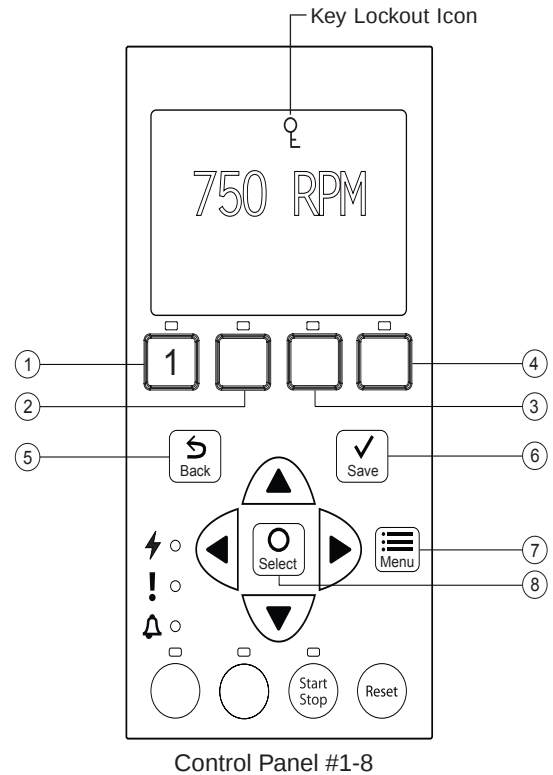

Always close the keypad cover after using the keypad.

Using screwdrivers or pens to program the pump will damage the keypad overlay. Use your
«kdbop l kiv t ebk mo l do^ j j fkd qeb mr j m»

1. Be sure the pump is powered on and the green power LED is on.
2. Select one of the speed buttons, then press the button (LED on) to start the pump. The pump will go into priming mode if priming feature is enabled.

1. Press  to stop the pump.


The pump will stop if the communication cable is disconnected (e.g., disconnect the communication cable, and switch OFF circuit breaker to remove power from the pump).

The pump can automatically restart if the communication cable is connected.

1. While the pump is running, press the  or  arrow to adjust to desired speed setting.
2. Press and hold down a  button (1-4) for three (3) seconds to save speed to the button or press  to save the speed.

The pump is programmed with four default speeds of 750, 1500, 2350 and 3110 RPM. Speed buttons 1-4 are for each of the preset speeds as shown below.

1. Be sure the pump is powered on and the green power LED is on.
2. Press the  button (1- 4) corresponding to the desired preset speed and release quickly. The LED above the button will turn on.
3. Press . The pump will quickly change to the selected preset speed.

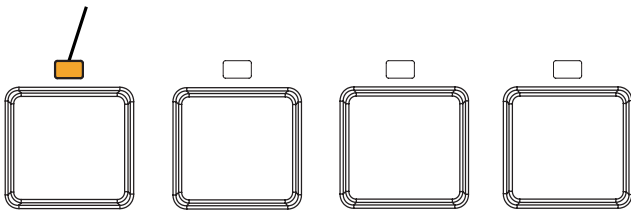

The IntelliFlo® Variable Speed Pump can be programmed in three different modes:

since there are no buttons on the control panel for Speeds 5-8. The default setting for Speeds 5-8 is “Disabled”.



Speed Menu Tree Options

Assigns a speed to one of the four Speed buttons on the control panel. This mode can only be used for speeds 1-4.


To operate in Manual mode, press one of the four speed buttons and then press the  button. The pump will run the assigned speed for that speed button.

Speeds 1-4 can be programmed to run at a certain speed and for a duration of time once a speed button is pressed.

Speeds 3 and 4 are Egg Timers by default. This prevents the pump from running at a speed higher than . If a different method of operation, speeds 3 and 4 can be changed to Manual mode in the control menu.

To operate in Egg Timer mode, press a speed button and then press . The pump will run that speed for the set amount of time and then turn off.

Mo I do^ j pmbbap . *5 pq^oq ^ka pq l m ^q ^ pmb`f«` qf j b during a 24 hour period. Speeds programmed in Schedule mode will override any manually selected speed (speeds set by manually pressing any of the speed buttons on the control panel).

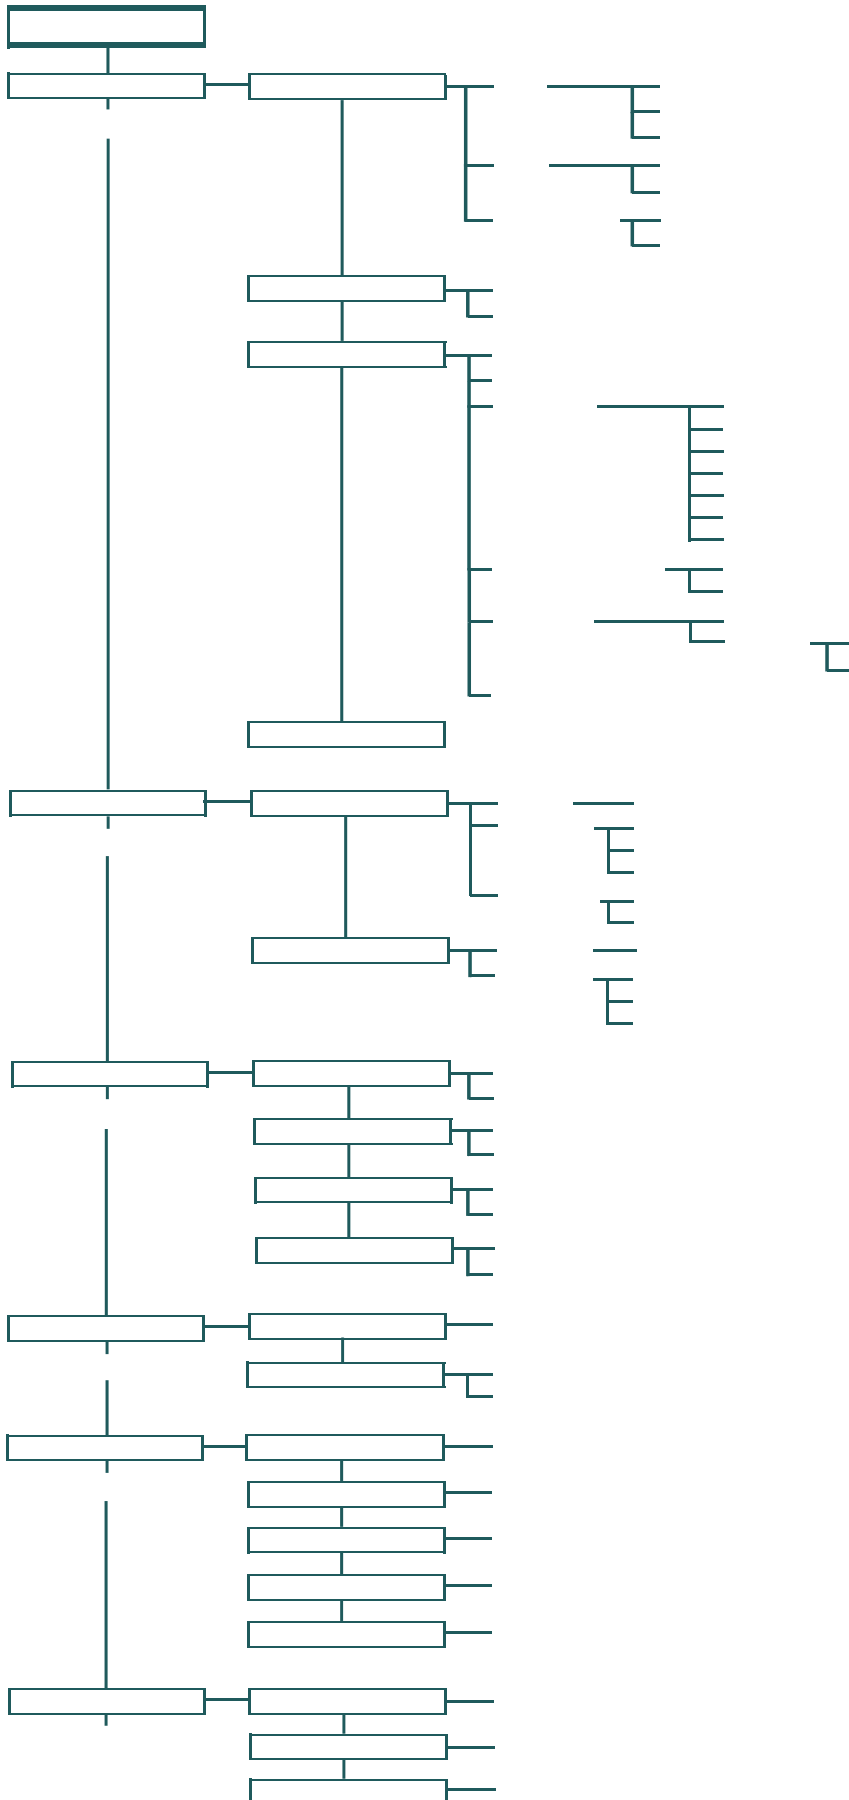



The time controls all scheduled times, functions, and programmed cycles and stores the correct time for up to 96 hours after power is turned off. Reset if the power is off longer than 96 hours.

1. Check that the green power LED is on.
2. Press **ENTER**.
3. Press **ENTER** to select "Settings".
4. Use the **LEFT** or **RIGHT** arrows to scroll to "Date and Time" and press **ENTER**.
5. Press **ENTER** again and use **LEFT** or **RIGHT** arrows to set the date.
6. Press **ENTER** to save user input and return to "Date and Time."
7. Use the **LEFT** or **RIGHT** arrows to scroll to "Time" and press **ENTER**.
8. Use the **LEFT** or **RIGHT** arrows to scroll to set the time.

To set AM/PM or a 24 hour clock see the next section "Set AM/PM or 24 Hour Clock."

9. Press **ENTER** to save. To cancel any changes, press **ESC** to exit without saving.
10. Press **ESC** to exit.

To change the time from a 12 hour clock (AM/PM) to a 24 hour clock:

1. Press **ENTER**.
2. Press **ENTER** to select "Settings".
3. Use the **LEFT** or **RIGHT** arrows to scroll to "Date and Time" and press **ENTER**.
4. Use the **LEFT** or **RIGHT** arrows to scroll to "AM/PM" and press **ENTER**.
5. Use the **LEFT** or **RIGHT** arrows to scroll to choose between 24 hr. and AM/PM.
6. Press **ENTER** to save. To cancel any changes, press **ESC** to exit without saving.
7. Press **ESC** to exit.

The minimum pump speed can be set from 450 RPM to 1700 RPM. The default setting is 450 RPM.

1. Check that the green power LED is on.
2. Press **ENTER**.
3. Press **ENTER** to select "Settings".
4. Use the **LEFT** or **RIGHT** arrows to scroll to "Min/Max".
5. Use the **LEFT** or **RIGHT** arrows to scroll to "Set Min Spd".
6. Press **ENTER** to change the setting. The cursor will appear in the **Min Spd** field.

7. Press the **LEFT** or **RIGHT** arrows to change the minimum speed setting from 450 to 1700 RPM.
8. Press **ENTER** to save. To cancel, press **ESC** to exit edit mode without saving.
9. Press **ESC** to exit.

The maximum speed can be set from 1900 RPM to 3450 RPM (default is 3450). Use this setting to set the maximum running speed of the IntelliFlo® Variable Speed Pump.

1. Check that the green power LED is on.
2. Press **ENTER**.
3. Press **ENTER** to select "Settings".
4. Use the **LEFT** or **RIGHT** arrows to scroll to "Min/Max".
5. Use the **LEFT** or **RIGHT** arrows to scroll to "Set Max Spd".
6. Press **ENTER** to change. The cursor will appear in the **Max Spd** field.
7. Press the **LEFT** or **RIGHT** arrows to change the maximum speed setting from 1900 to 3450 RPM.
8. Press **ENTER** to save. Press **ESC** to exit. To cancel, press the **ESC** to exit without saving.

Maximum Speed will limit Priming Speed, except in one case. If the Maximum Speed is set below the lowest available Priming Speed (2350 RPM) then the pump will exceed the Maximum Speed while the priming feature is running. This prevents the pump from having trouble priming if the Maximum Speed is set this low. If this is a problem, priming can be disabled in the Priming Menu (see "Priming" section on page 13).

The default pump address is #1 and only needs to be changed when there is more than one pump on an automation system. Change the address to allow the automation system to send a command to the correct pump.

Use this setting if your pump is connected via the RS-485 COM port to an IntelliTouch®, EasyTouch®, SunTouch® Control System or IntelliComm® Communication Center. For EasyTouch, SunTouch or IntelliComm systems, the pump only communicates with address #1. The pump address can be set from 1-16. The IntelliTouch system can communicate to only four (1-4) pumps.

IntelliFlo pumps cannot be connected in series with other pumps.

1. Be sure the green power LED is on and the pump is stopped.
2. Press **ENTER**.
3. Press **ENTER** to select "Settings".
4. Use the **LEFT** or **RIGHT** arrows to scroll to "Device" and press **ENTER**.



5. Use the or arrows to scroll to "Pump Address" and press .
6. Press or arrows to change the address number from 1-16.
7. Press to save. To cancel any changes, press to exit without saving.
8. Press to exit.

The default setting for the LCD screen is 3. Screen contrast levels can be adjusted from 0 to 7 units for low or high lighting conditions.

Changes to the contrast setting do not update instantaneously. Changes to this setting must be saved before the contrast level changes.

1. Check that the green power LED is on.
2. Press .
3. Press to select "Settings".
4. Use the or arrow to scroll to "Device" and press .
5. Use the or arrow to scroll to "Contrast Level."
6. Press . Screen will show current contrast setting number. Use or to change number.
7. Press to save. To cancel any changes, press to exit without saving.
8. Press the button to exit.

To access the language menu:

1. Check that the green power LED is on.
2. Press and press to select "Settings".
3. Use the or arrows and scroll to "Device" and press .
4. Use the or arrows to scroll to "Select Language and press .
5. Use the or arrows to choose the desired language.
6. Press to select the control panel language. To cancel any changes, press to exit without saving.
7. Press to exit.

The default setting is Fahrenheit (°F). The pump can be set to either Celsius (°C) or Fahrenheit (°F).

1. Check that the green power LED is on.
2. Press .
3. Press to select "Settings".
4. Use the or arrows to scroll to "Device" menu item. Press .
5. Use or arrows to scroll to "Temperature Units" and press .
6. Use or arrows to choose Celsius (°C) or Fahrenheit (°F).
7. Press to save. To cancel any changes, press to exit without saving.
8. Press to exit.

The default setting for password protection is disabled. When this feature is enabled, the pump display will prompt for the password before allowing access to the control panel and buttons.

The entered password is any combination of four (4) digits.

The pump can always be stopped by pressing , even when password protection is enabled.


Password protection cannot be turned back on with while running in manual mode.

Pressing when the pump is off will return it back to the Running Cycles Mode and run at the next scheduled run time. If the present time is within the scheduled run time, the pump will run the scheduled speed.

All functions including programming are disabled in Password Protection Mode.

Screen will read "Enter Password" if any button other than the button is pressed

Key icon displayed in the upper left side of the screen when Password Protection is on.

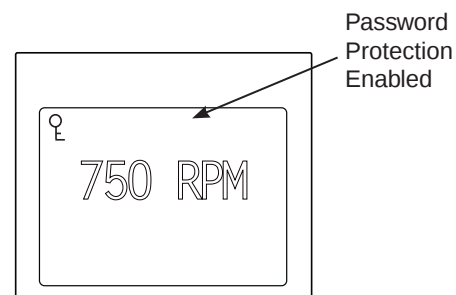




1. Check that the green power LED is on.
2. Press . Press to select "Settings".
3. Use the or arrow to scroll to "Device".
4. Press .
5. Press or arrow to scroll to "Password". The default setting is "Disabled".
6. Press .
7. Press or arrow to change the setting to "Enabled". Press to save.
8. Press the arrow. "Password Timeout" will be displayed. The factory default time is 1 minute. This means the IntelliFlo® Variable Speed Pump will go into Password Protection mode 1 minute after the last control panel key is pressed.
9. Press to change time setting from 1 minute to 6 hours and press to save.
10. Press the arrow and then press on "Enter Password" to change the setting.
11. Press the or arrows to move cursor and press the or arrow to change the password number to desired setting.
12. Press to save. To cancel any changes, press to exit without saving.

1. Press any button (besides the speed button) to prompt the screen for a password.
2. To enter password, use the and arrows to move the cursor and the and arrow button to scroll through the digit then press .



The IntelliFlo® Variable Speed Pump can be programmed in three different modes:

. Speeds 1-4 can be programmed in all three modes. Speeds 5-8 can only be programmed in Schedule mode since there are no buttons on the control panel for Speeds 5-8. The default setting for Speeds 5-8 is "Disabled".

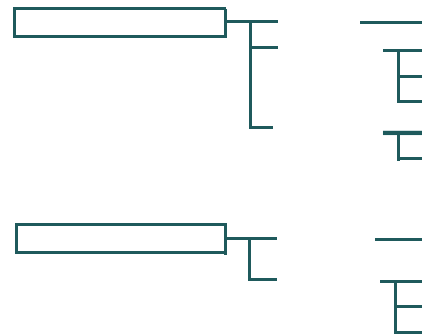

Speed Menu Tree Options

Assigns a speed to one of the four Speed buttons on the control panel. This mode can only be used for speeds 1-4.

To operate in Manual mode, press one of the four speed buttons and then press the button. The pump will run the assigned speed for that speed button.

Speeds 1-4 can be programmed to run at a certain speed and for a duration of time once a speed button is pressed.

Speeds 3 and 4 are Egg Timers by default. If you desire a different method of operation, speeds 3 and 4 can be changed to Manual mode in the control menu.


To operate in Egg Timer mode, press a speed button and then press . The pump will run that speed for the set amount of time and then turn off.

Mo I do^ j pmbbap . *5 pq^oq ^ka pq l m ^q ^ pmb`f«` qf j b during a 24 hour period. Speeds programmed in Schedule mode will override any manually selected speed (speeds set by manually pressing any of the speed buttons on the control panel).




1. Press **ENTER**.
2. Use **UP** or **DOWN** arrows to scroll to "Speed 1-8", then press **ENTER**.
3. Use **UP** or **DOWN** arrows to scroll to the speed you wish to program, then press **ENTER**.
4. Speeds 1-2 default setting is Manual. Speeds 3-4 default setting is Egg Timer. To set a speed in Manual mode, press the **RIGHT** arrow ("Set Speed" will display) and press **UP** or **DOWN** to change. Use the **UP** or **DOWN** arrow to adjust speed.
5. Press **ENTER** to save the new speed setting.

1. Press **ENTER**.
2. Use **UP** or **DOWN** arrows to scroll to "Speed 1-8", then press **ENTER**.
3. Use **UP** or **DOWN** arrows to scroll to the speed you wish to program, then press **ENTER**.
4. Use the **UP** or **DOWN** arrows to scroll to "Egg-Timer", then press **ENTER**.
5. To set a speed in Egg-Timer mode, press the **RIGHT** arrow ("Set Speed" will display) and press **UP** or **DOWN** to change. Use the **UP** or **DOWN** arrow to adjust speed.
6. Press **ENTER** to save the new speed setting.
7. Now press the **RIGHT** arrow ("Set Time" will display) and press **UP** or **DOWN** to change. Use the **UP** or **DOWN** arrows to adjust the time.
8. Press **ENTER** to save the new time setting.



Manual Mode Menu Screen



Egg Timer Menu Screen

In Schedule mode, Speeds 1-8 can be programmed to run a certain speed at a certain time of day. To run a scheduled speed, press **ENTER**. The screen will display "Running Schedules" when it is ready to run a scheduled speed. If **ENTER** is pressed while a scheduled speed is running, the pump will stop running the scheduled speed. The pump will not continue to run the scheduled speed until the **ENTER** button is pressed again.

1. Press **ENTER**.
2. Use **UP** or **DOWN** arrows to scroll to "Speed 1-8", then press **ENTER**.
3. Use **UP** or **DOWN** arrows and press **ENTER** for the speed you wish to set and schedule.
4. Press **ENTER** (display will be highlighted) and scroll to "Schedule".
5. Press **ENTER**.
6. Press **RIGHT** arrow ("Set Speed" will display) and press **UP** or **DOWN** to change. Use the **UP** or **DOWN** arrow to adjust speed.
7. Press **ENTER** to save the new speed.
8. Press the **RIGHT** arrow again, "Set Start Time" will display. Press **UP** or **DOWN** - the cursor will highlight the minute column.
9. Use the **UP** or **DOWN** arrow to change the time and the **LEFT** or **RIGHT** arrow to move cursor from minutes to hours.
10. Press **ENTER** to save the new start time setting.
11. Press **RIGHT** arrow - "Set Stop Time" will display. Press **UP** or **DOWN**. Repeat Steps 8-9 to set stop time.
12. Press **ENTER** to save the new stop time setting.
13. Press **ENTER**.

The IntelliFlo® Variable Speed Pump will prime and start time.

When running in Schedule or Egg Timer mode, the countdown time (T 00:01) showing the hours and minutes remaining is displayed.



A speed cannot be programmed with the same start and stop times. To run a speed without stopping, set the Start time one minute after the stop time.

A single speed will run non stop if programmed with a Start Time of 8:00 AM and a Stop time of 7:59 AM.



The pump will not run the scheduled speeds until the button is pressed (LED on) to place the pump in Schedule mode.

When two speeds are scheduled during the same run time the pump will run the higher RPM Speed regardless of Speed # in use.

The most recent command, Manual or Schedule, takes priority regardless of speed number RPM.



This function is for programming speeds that will run when the IntelliComm® Communication Center sends it a command. For example, Terminal 3 and 4 in the IntelliComm system will correspond to External Control Program #1. (5 and 6 to Ext Ctrl #2).

The Stop Delay feature allows the user to program the pump to run a Program Speed after the External Control has been deactivated. This feature can be used to provide a cooling down period for the pump after a trigger signal from an installed heater has been deactivated. Each individual Program Speed can have a Stop Delay of 1 to 10 minutes programmed.

Use the External Control feature to program the IntelliComm system power center.

1. Check that the green power LED is on.
2. Press the button.
3. Use or arrow to scroll to "Ext. Ctrl".
4. Press . "Program 1" is displayed.
5. Press . "750 RPM" is displayed.
6. Press . The "RPM" number will highlight.
7. Press or arrow to change the RPM setting.
8. Press to save the setting.
To cancel any changes, press the button to exit without saving.
9. If you do not wish to program a Stop Delay, continue to step 13. If you do wish to program a Stop delay press or arrow to scroll to "Stop Delay".
10. Press to set Stop Delay.
11. Press or arrows to change the Stop Delay setting. Stop Delay can be set from 0 minutes (disabled) to 10 minutes.
12. Press to save the setting.
To cancel any changes, press the button to exit without saving.
13. Press to return to set Program 2.
14. Use or arrow to scroll to "Program 2".
15. Repeat Steps 5 through 13 to set Program 2, 3, and 4.



The Time Out feature is displayed in hours and minutes (Hrs:Mins).

L k`b Qf j b L r q fp «kfpeba) qeb mr j m t fii obqrok q l f q p
previous mode of operation, the Start/Stop LED will be lit and ready to turn on at the next scheduled run time.

1. Check that the green power LED is on.
2. Press .
3. Use or arrows to scroll to “Features”, then press .
4. Press to choose “Timeout”.
5. Then press again to choose “Timeout Duration”.
6. Press to change the time. The cursor will highlight the minutes column.
7. Press the arrow to move cursor to the hours column. Time out can be set from 1 minute to 10 hours.
8. Press to save the setting.
To cancel any changes, press to exit without saving.
9. Press to exit the menu.

®

This feature can be used to increase the pump speed for vacuuming, cleaning, adding chemicals, after a storm for extra skimming capability.

Press the button (LED on) and then to start. When the Quick Clean cycle is over, the pump will resume regular schedules and be in “Running Schedule” mode.

1. Check that the green power LED is on and the pump is stopped.
2. Press .
3. Use or arrows to scroll to “Features”, then press .
4. Press the arrow and press for “Quick Clean”.
5. Press to choose “Set Speed”.
6. Press q l efdeifdeq qeb \$OM J ¶ «opq % l kbp& column and change the speed.
7. Use or arrows to change the speed.
8. Press to save the speed.

9. Press the arrow again, and press for “Time Duration”.
10. Press to change the time. The cursor will highlight the minutes column.
11. Use or arrows to change the time from 1 minute to 10 hours.
12. Press to save the time.
13. Press to exit the menu.



The default setting for Priming is ENABLED. This setting allows the pump to automatically detect if it is primed for startup.

The priming feature increases the pump speed to 1800 RPM and pauses for three (3) seconds. If there is prc«`fbkq t ^qbo -l t fk qeb mr j m _^phbq) qeb mr j m t fii go out of priming mode and run its commanded speed.

Fc qeb t ^qbo -l t fp k l q prc«`fbkq) qeb mr j m pmbba t fii increase to the “Max Speed” setting and remain for the priming delay time (default 20 seconds). If there is prc«`fbkq t ^qbo -l t fk qeb mr j m _^phbq ^q qefp qf j b) fq will exit priming mode and transition to the commanded speed.

Fc qebob fp pqfii fkprc«`fbkq -l t fk qeb mr j m _^phbq) ^p determined by the Priming Range setting, the pump will try to prime at the “Priming Speed” for the amount of time set in the “Maximum Priming Time” menu, unless the set “Maximum Speed” is lower than the set “Priming Speed”. Once the pump achieves prime, it will resume normal operation after the preset priming delay.

It is possible to set “Maximum Speed” too low for the pump to properly prime. Maximum Speed will limit Priming Speed, except in one case. If the Maximum Speed is set below the lowest available Priming Speed (2350 RPM) then the pump will exceed the Maximum Speed while the priming feature is running. This prevents the pump from having trouble priming if the Maximum Speed is set this low. If this is a problem, priming can be disabled in the Priming Menu.



Display during priming



Allows IntelliFlo® Variable Speed Pump to automatically detect if pump is primed for startup. The pump will speed up to 1800 RPM and pause for three (3) seconds - if there is enough water in the basket, the pump will go out of priming mode and run the commanded speed.



SET SPEED

The priming speed can be set between 3450 RPM and 2350 RPM. If the pump is on an equipment pad that is close to the water level, it will not need to run at 3450 RPM to successfully prime. The setting can be lowered to prevent running at a higher speed than necessary.

Day to day factors (i.e. local ambient pressure, water/air temperatures, amount of water retained from last system run) can effect priming performance. Because of the frequently changing nature of these factors the priming speed should be set high enough to accommodate environmental and mechanical changes to ensure that the pump can successfully prime. Cfkafkd qeb j l pq bccb`qfsb ^ka bc«`fbkq pmbba clo v l ro pmb`f«` kbbap j ^v q^hb `^obcri qbpqfkd and evaluation of priming performance.



MAX PRIMING TIME

The maximum priming time can be set from 1 - 30 minutes. This setting is the amount of time qeb mr j m tfii qov q l mof j b _bclob fq dfsbp ^ mof j fkd boolo+ fc qefp l``rop) «ii qeb mr j m _^phbq with water and restart the pump.



PRIMING RANGE

Priming range can be set from 1-10. The smaller the range, the more water the pump has to be moving to detect that it is primed. At larger ranges, the pump will detect that it is fully primed while moving less water. If the range is set too high, then the pump may exit Priming mode before it has fully primed. The range will automatically adjust with the priming set pmbba _b`^rpb qeb -l t o^qbp lc qeb mr j m tfii _b il t bo ^q il t bo pmbbap+



PRIMING DELAY

Priming delay can be set from 1 second to 10 minutes.

If the pump does not have enough water after the automatic priming mode, the pump will increase to the Maximum Speed (under “Pump Settings” on page 8) and run for 20 seconds (or for the time set).

You may need to increase the priming delay to allow the system to stabilize before the pump starts running speeds. If pump continues to show a priming error, increasing the priming delay time might correct this issue.



Priming features are only accessible if priming is "Enabled".

1. Press .
2. Use  arrow to scroll to "Priming" and press .
3. The factory default is set to priming "Enabled". To disable, press .
4. Press  if you have changed the setting - this will save the selection.
5. Press the  arrow - the screen will read "Max Priming Time".
6. To change from factory default, press . The cursor will highlight.
7. Use the  or  arrows to change the time from 1 minute to 30 minutes.
8. Press  to save.
9. Press the  arrow - the screen will read "Priming Range". Default is "5".
10. Press  to change the priming range. The cursor will highlight the number.
11. Use the  or  arrows to change from 1 to 10. Increasing the number allows the drive to detect motor feedback.
12. Press  to save.
13. Press the  arrow - the screen will read "Priming Delay". Default is 20 seconds.
14. Press  to change the priming delay time.
15. Use the  or  arrows to change from 1 second to 10 minutes.

Increasing the time causes the pump to stay in the priming mode longer.

16. Press  to save the setting.


17. Press  to exit.

When the IntelliFlo® Variable Speed Pump is connected to an automation control system, (IntelliTouch®, EasyTouch® or SunTouch® Control Systems),


If priming is enabled on start up, the pump responds to its internal settings responding to commands from an automation control system.

If the pump is connected to an automation control system and priming is not desired,


1. Disable the priming feature on the automation control system at the load center or using an IntelliTouch or EasyTouch system remote. (Refer to the automation control system user's guide for additional information).
2. Temporarily disconnect the RS-485 communication cable.
3. Open the lid to the control panel to disable priming on the pump. Press , use the  buttons to scroll and select "Priming", then select "Disabled" (the factory default is set to "Enabled"). Press  to exit the menu.
4. Once priming is disabled, reinstall the RS-485 communication cable.

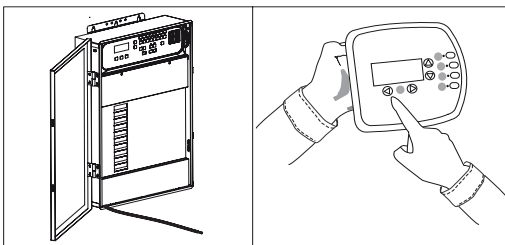


1. Disable priming on automation control system.

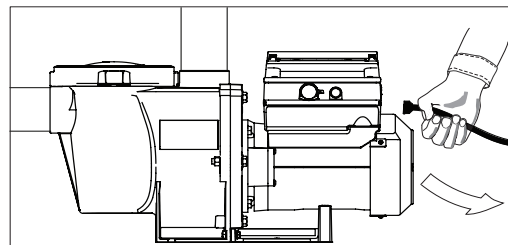

2. Disconnect the RS-485 communication cable.

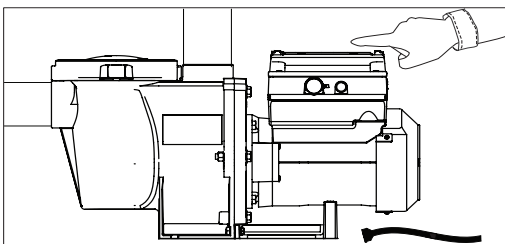

3. Disable priming on pump.

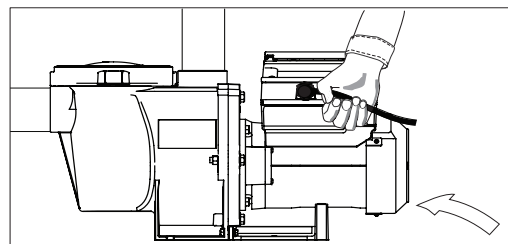

4. Reinstall the RS-485 communication cable.



The sensor for Thermal Mode is in the drive, on top of the motor. This feature allows you to set a speed (450 RPM - 3450 RPM) that runs when the IntelliFlo® Variable Speed Pump goes into Thermal Mode. The temperature level that you wish Thermal Mode to start can also be set.

This feature is for protection of the pump. Do not depend on the Thermal Mode feature for freeze protection of the pool. Certain situations could cause the pump to sense a different temperature than actual air temperature.

Your automation systems air temperature sensor should be used to sense actual temperature. For example, if the pump is located indoors, the temperature of the room does not indicate the outdoor temperature. The pump does not sense the water temperature.

- 1. Check that the green power LED is on.
- 2. Press .
- 3. Use the arrow to scroll to “Thermal Mode” and press .
- 4. The factory default for Thermal Mode is “Enabled”. To disable Thermal Mode, press to highlight “Enabled”.
- 5. Press the arrow - “Disabled” is displayed.
- 6. Press to save.




Setting the Thermal Mode Pump Speed

- Thermal Mode features are only accessible if Thermal Mode is “Enabled”.
- 1. With “Thermal Mode” displayed on the screen, press the arrow - “Set Speed” is displayed. The factory default is 1000 RPM.
 - 2. Press to change the speed. The cursor will efdeifdeq qeb «opq `lir j k %l kbp&+`
 - 3. Use the or arrows to set speed (450 - 3450 RPM).
 - 4. Press to save the speed.
 - 5. Press the arrow to Pump Temperature (the temperature the pump will activate Thermal Mode, default is 40° F/4.4° C).
 - 6. Press to change the setting. The cursor will efdeifdeq qeb «opq `lir j k+ @^k _b pbq 40° F to 50° F (4.4° C - 10° C).
 - 7. Press to save the temperature setting.
- To cancel any changes, press to exit without saving.
- 8. Press to exit.



Setting the Thermal Mode Pump Temperature

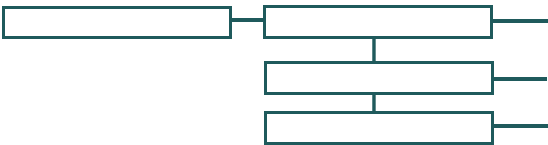

Thermal Mode Menu Options

CONNECTING TO AN AUTOMATION SYSTEM

Use the RS-485 communications cable to remotely control the IntelliFlo® Variable Speed Pump from an IntelliComm communication center. The IntelliComm system provides four (4) pairs of input terminal connections. These inputs are actuated by either 15 - 240 VAC or 15 - 100 VDC. Use the device inputs, to control the programmed pump speeds.

For the pump to accept commands from the IntelliComm system, the pump must be in the “Running Schedules” mode (LED above Start/Stop button is on). If more than one input is active, the highest number will be communicated to the pump. The IntelliComm system will always communicate to pump using ADDRESS #1.

If programs 1 and 2 are activated, program 2 will run, regardless of the assigned speed (RPM). The higher program number will always take priority.

External Control is for programming speeds that will run when the IntelliComm communication center controller sends it a command.

For example, Terminal 3 and 4 in IntelliComm system will correspond to External Control Program #1. (5 and 6 to Ext Ctrl #2). Use the External Control feature to program the IntelliComm communication center.

1-2	Power Supply	100 - 240 VAC	100 mA	1 Input	50/60 Hz
3-4	Program 1	15 -240 VAC or 15 - 100 VDC	1 mA	1 Input	50/60 Hz
5-6	Program 2	15 -240 VAC or 15 - 100 VDC	1 mA	1 Input	50/60 Hz
7-8	Program 3	15 -240 VAC or 15 - 100 VDC	1 mA	1 Input	50/60 Hz
9-10	Program 4	15 -240 VAC or 15 - 100 VDC	1 mA	1 Input	50/60 Hz
11 12	RS-485 + Data: Yellow - Data: Green	-5 to +5 VDC	5 mA	1 Output	N/A
	Ground				

The pump can be controlled by an EasyTouch or IntelliTouch system via the RS-485 communication cable. The EasyTouch and/or IntelliTouch control system starts, stops and controls the speed of the pump.

EasyTouch and/or IntelliTouch systems rewrite the pump memory when a command is given. This can take several seconds and can cause a delay until the pump physically responds.

The pump control panel is disabled when communicating with an EasyTouch and/or IntelliTouch system.

The default pump address is “1” (only address for EasyTouch system).




IntelliComm Communication Center



1. Switch the main power off to the load center.
2. Unlatch the two enclosure door spring latches, and open the door.
3. Remove the two retaining screws securing the high voltage cover panel, and remove it from the enclosure.
4. Loosen the two access screws securing the control panel.
5. Lower down the hinged control panel to access the EasyTouch or IntelliTouch control system circuit board.
6. Route the communication cable into the plastic grommet (located on the lower left side of the load center), up through the low voltage raceway to the EasyTouch or IntelliTouch system circuit board.
7. Strip back the cable conductors 6 mm (1/4"). Insert the two wires into the COM port screw terminals on the EasyTouch and/or IntelliTouch system circuit board. Secure the wires with the screws.
8.



Connect the GREEN (#2) and YELLOW (#3) wires to the COM port screw terminals (#2 and #3). Be sure to match the color coding of the wires; YELLOW to YELLOW and GREEN to GREEN. The Red wire is not connected. Secure the wires with the screws.

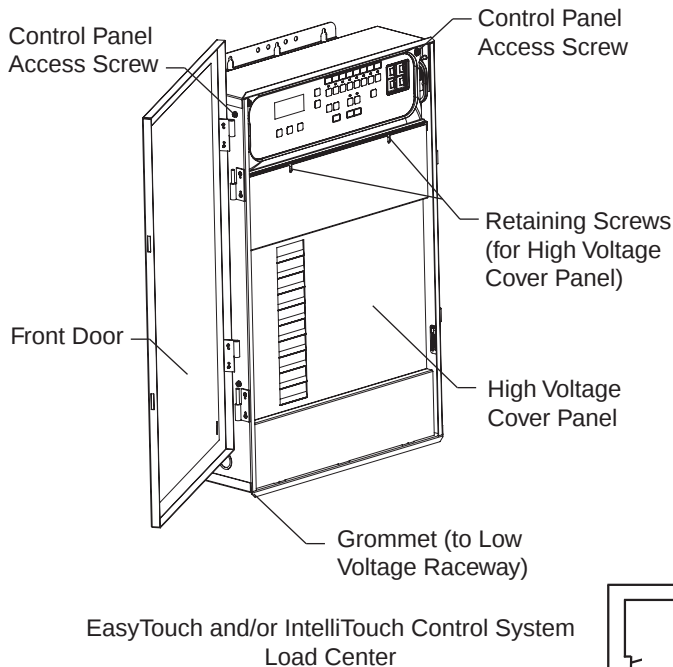

Connect the GREEN (#2) and YELLOW (#3) wires to the COM port (J20) screw terminals (#2 and #3). Be sure to match the color coding of the wires; YELLOW to YELLOW and GREEN to GREEN. The Red wire is not connected. Secure the wires with the screws.

Multiple wires may be inserted into a single screw terminal.

9. Close the control panel into its original position and secure it with the two screws.
10. Install the high voltage cover panel and secure it with the two retaining screws.
11. Close the load center front door. Fasten the spring latch.
12. Switch the power on to the load center.

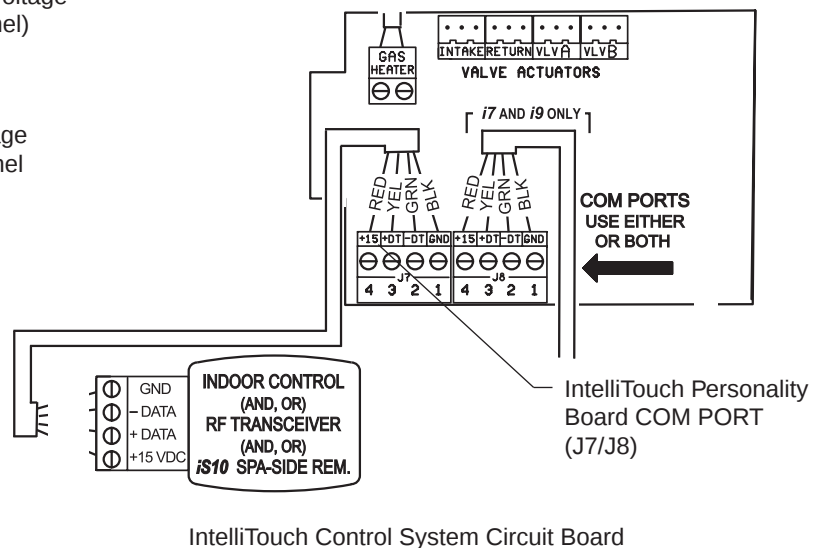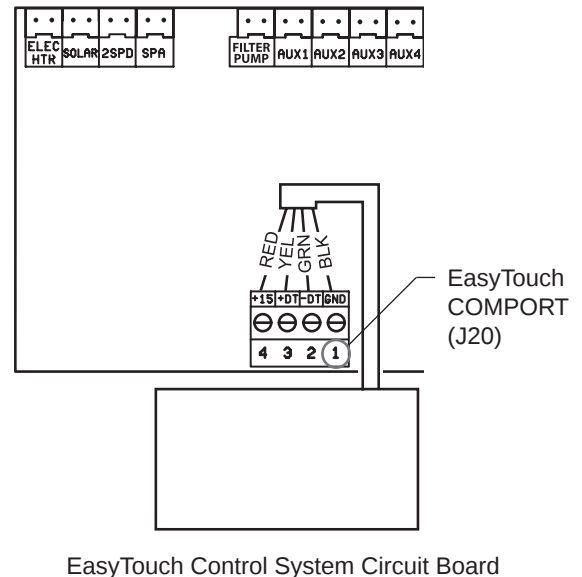


The IntelliFlo® Variable Speed Pump can be controlled by a SunTouch system via the RS-485 communication cable.

1. Unlatch the front door of the SunTouch system power center and open the door.
2. Loosen the retaining screw on front panel. Open the hinged front panel to access the electronics compartment.
3. Route the two conductor cables up through the power center grommet opening located on the left side, and up through the low voltage raceway to the motherboard.

WARNING

4. Strip back the cable conductors 6 mm (1/4"). Insert the wires into the screw terminals (provided). Secure the wires with the screws. Be sure to match the color coding of the wires; YELLOW to YELLOW and GREEN to GREEN.
5. Insert the connector on the COMPORT (J11) screw terminal on the SunTouch system circuit board.
6. Close the control panel and secure it with the retaining screw.
7. Close the front door. Fasten the spring latch.

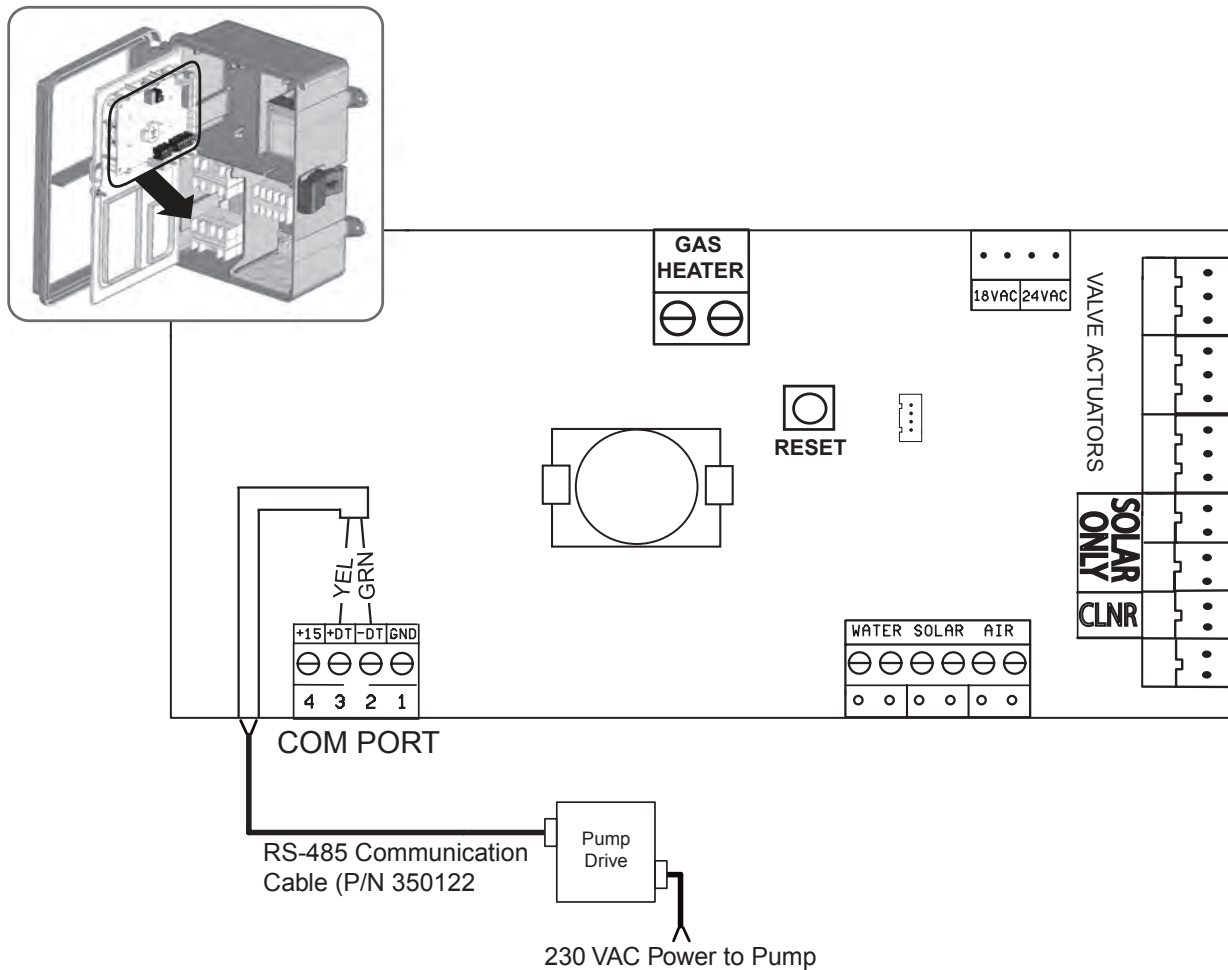

MAINTENANCE

⚠ WARNING

⚠ CAUTION

The strainer basket (or 'strainer pot'), is located in front of the pump housing. The strainer basket must be kept clean and free of debris. Inspect basket through the lid on the top of the housing. Be sure to visually inspect the strainer basket at least once a week. Dirty strainer baskets reduce the pump motor.

1. Press  button on the pump and turn off the pump at the circuit breaker. Disconnect communication cable from pump.
2. Relieve pressure in the system.
3. Turn the lid and clamp counter-clockwise and remove from the pump.
4. Remove debris and rinse out the basket. Replace the basket if it is cracked.
5. Put the basket back into the housing. Be sure to align the notch in the bottom of the basket with the rib in the bottom of the volute.
6. Fill the pump pot and volute up to the inlet port with water.
7. Clean the lid and clamp, O-ring, and sealing surface of the pump pot.
It is important to keep the lid O-ring clean and well lubricated.
8. Reinstall the lid by placing the clamp and lid on the pot. Be sure the lid O-ring is properly placed.
Seat the clamp and lid on the pump then turn clockwise until the locking ring handles are perpendicular to the inlet.
9. Turn the power "ON" at the circuit breaker. Reconnect communication cable from pump.
10. Open the manual air relief valve on the top of the .
11. Wait until all pressure is relieved. Start the pump.
12.  the manual air relief valve.

⚠ WARNING



To protect the pump electronics from freeze damage, the pump will switch on to generate internal heat as the temperature drops below freezing if Thermal Mode is enabled.


In mild climate areas, when temporary freezing  all night to prevent freezing.

You are responsible for determining when freezing conditions may occur. If freezing conditions are expected, take the following steps to reduce the risk of freeze damage.

To prevent freeze damage, follow the procedures below:

1. Shut off electrical power for the pump at the circuit breaker.
2. Drain the water out of the pump housing by removing the two thumb-twist drain plugs from the housing. Store the plugs in the pump basket.
3. Cover the motor to protect it from severe rain, snow and ice.

The motor may be covered during a storm, winter storage, etc., but never when operating or expecting operation. Never wrap motor with plastic or other air tight materials during winter storage.

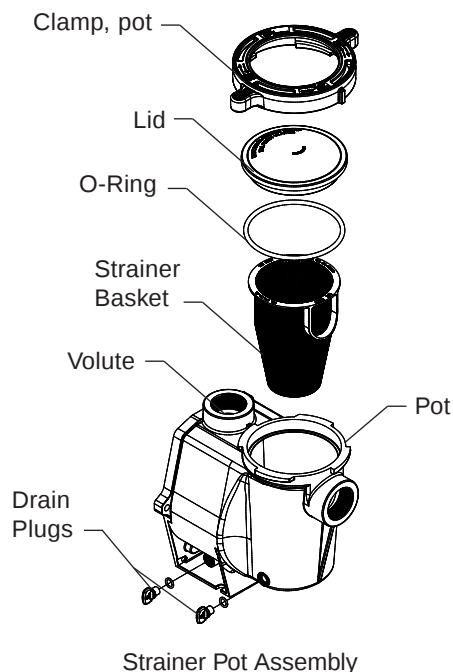

SERVICING

⚠ WARNING

⚠ WARNING

⚠ CAUTION

1. Shade the motor from the sun.
2. Any enclosure must be well ventilated to prevent overheating.
3. Provide ample cross ventilation.
4. Provide a minimum clearance of three (3) inches behind the motor fan for proper circulation.

1. Protect from any foreign matter.
2. Do not store (or spill) chemicals on or near the motor.
3. Avoid sweeping or stirring up dust near the motor while it is operating.
4. If a motor has been damaged by dirt it may void the motor warranty.

1. Protect from continuous splashing or continuous sprayed water.
2. Protect from euqob j b t b^qeb0 pr`e ^p -l l afkd+
3. If motor internals have become wet - let it dry before operating. Do not allow the pump to operate if it has _bbk -l l aba+
4. If a motor has been damaged by water it may void the motor warranty.
5. Be sure to close the keypad cover after every use.

The Shaft Seal consists primarily of two parts, a rotating ceramic seal housed in the impeller and a stationary spring seal in the sealplate. The pump requires little or no service other than reasonable care, however, a shaft seal may occasionally become damaged and must be replaced.

The polished and lapped faces of the seal could be damaged if not handled with care.

Tools required:

- 3/32 inch Allen head wrench
- Two (2) 9/16 inch open end wrenches
- 1/4 inch Allen head wrench
- No. 2 Phillips head screwdriver
- Adjustable wrench

To remove and repair the motor subassembly, follow the steps below:

1. Turn off the pump circuit breaker at the main panel.
2. Disconnect the RS-485 communication cable from the pump (if connected to pump).
3. Drain the pump by removing the drain plugs. No tools are required.
4. Remove the four (4) Phillips head screws from the outer corners of the drive top cover.
5. Disconnect the keypad top cover from the drive and set it to the side in a safe place.
6. Remove the three (3) Phillips head screws, located inside the drive, that anchor the drive to the motor.
7. Remove the drive by lifting upwards to separate it from the motor.
8. Use the 9/16 inch wrenches to remove the six (6) bolts that hold the housing (strainer pot/volute) to the rear subassembly.
9. Gently pull the two pump halves apart, removing the rear subassembly.
10. Use a 3/32 inch Allen head wrench to loosen the two (2) holding screws located on the diffuser.
11. Hold the impeller securely in place and remove the impeller lock screw by using a Phillips head screwdriver. The screw is a left-handed thread and loosens in a clockwise direction.

⚠ CAUTION

12. Use a 1/4 inch Allen head wrench to hold the motor shaft. The motor shaft has a hex-shaped socket on the end which is accessible through the center of the fan cover.
13. To unscrew the impeller from the shaft, twist the impeller counterclockwise.
14. Remove the four (4) bolts from the seal plate to the motor, using a 9/16 inch wrench.
15. Place the seal plate f^`b a l t k l k ^ -^q pr0c^`b ^ka tap out the carbon spring seat.
16. Clean the seal plate, seal bore, and the motor shaft.

1. When installing the replacement shaft seal, use silicone sealant on the metal portion before pressing into the seal plate as shown.

Use extreme care when applying sealant. Be sure no sealant contacts the seal plate surface or the ceramic seal. Allow sealant to cure overnight before reassembling.

2. Before installing the rotating portion of the seal into the impeller, be sure the impeller is clean. Use a light density soap and water to lubricate the inside of the seal. Press the seal into the impeller with your thumbs and wipe off the ceramic and carbon faces with a clean cloth.
3. Remount the seal plate to the motor.
4. Screw in the impeller lock screw (counterclockwise to tighten).

5. Remount the diffuser onto the seal plate. Be sure the plastic pins and holding screw inserts are aligned.

Ensure that the seal plate o-ring is clean and free of debris.

6. Grease the diffuser o-ring and seal plate gasket prior to reassembly.
7. Assemble the motor subassembly to the pump housing by using the two (2) through bolts for proper alignment. Do not tighten the through bolts until all

Ensure that the seal plate gasket is properly seated inside of the pump assembly. The seal gasket can be pinched between the seal plate and the pump housing while tightening these six (6) screws, preventing a proper seal and producing a slow leak when the pump is restarted.

8. Reinstall the drive onto the top of the motor.
9. Fill the IntelliFlo® Variable Speed Pump with water.


10. Reinstall the pump lid and plastic clamp. See "Cleaning the Pump Strainer Basket" on page 20 for details
11. Reconnect the RS-485 communication cable to the pump.
12. Prime the pump; refer to "Priming the Pump" on page 4.

WARNING

CAUTION

1. Be sure all electrical breakers and switches are turned off before removing the control panel.
2. Disconnect the RS-485 communication cable from the pump.
3. Remove the four (4) Phillips head screws from the outer corners of the drive top cover.
4. Unplug the keypad top cover from the drive and set it to the side in a safe place.
5. Remove the three (3) Phillips head screws, located inside the drive, that anchor the drive to the motor.
6. Lift up the drive assembly and remove it from the motor adapter located on top of the motor assembly.

Be careful not to remove the gasket between the drive and motor, it is critical in keeping moisture out of the drive and motor. Replace the gasket if damaged. Do not reassemble with a damaged or missing gasket.

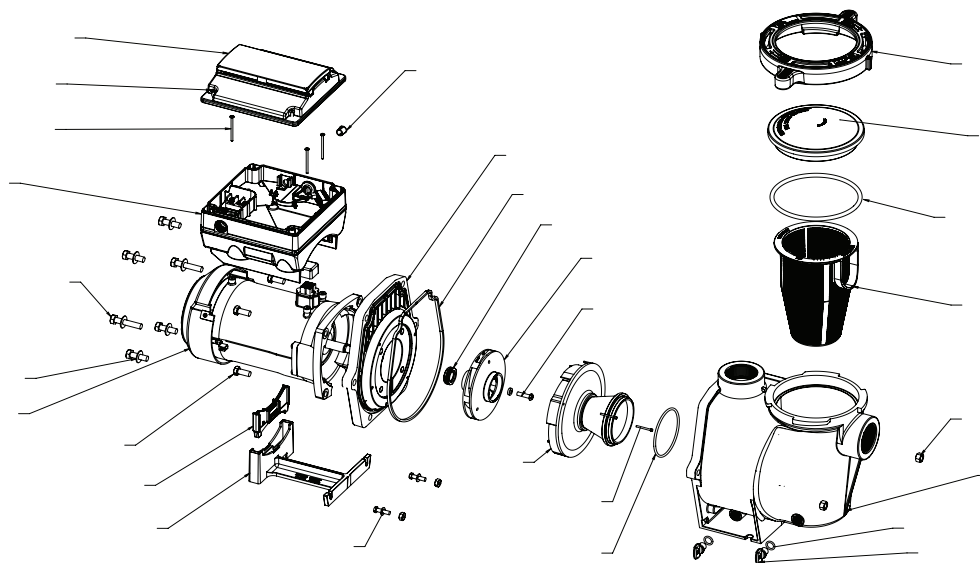


Pump Illustrated Parts View

⚠ CAUTION

1. Be sure all electrical breakers and switches are turned off before installing the drive.
2. Be sure that the gasket between the drive and motor is in place. It is critical in keeping moisture out of the drive and motor. Replace the gasket if damaged. Do not reassemble with a damaged or missing gasket.
3. Verify that the three (3) orange motor post caps are in position before placing the drive on the motor assembly.
4. Align the drive assembly with the motor adapter and seat the drive on the motor assembly.
5. Secure and tighten the drive assembly with the three (3) Phillips head screws.
6. Plug the keypad cover back into the drive.
7. Place the keypad cover in the desired orientation on the drive and reattach the four (4) screws in the corners of the drive.

Ensure that the keypad cable is not being pinched between the drive and keypad cover.

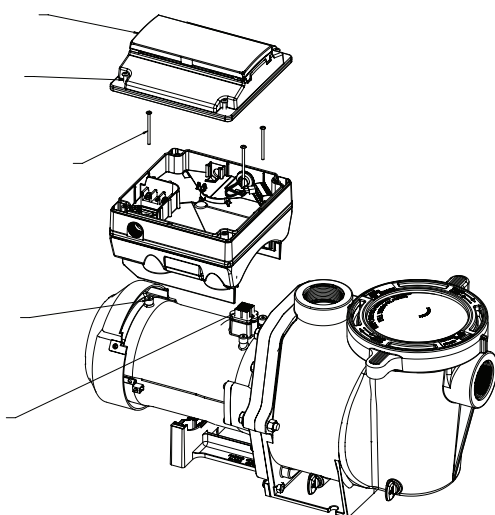

Drive Assembly and Removal

⚠ WARNING

TROUBLESHOOTING

WARNING



The IntelliFlo® Variable Speed Pump displays all alarms and warnings on the control panel display. When an alarm or warning condition exists, the corresponding light will be lit on the display.

All control panel buttons are disabled until the alarm or warning is acknowledged with the  button. Pressing the  button will clear the alarm once the fault condition has been resolved.

The pump will not start if the impeller is rotating.

The incoming supply voltage is less than 170 VAC. The drive faults to protect itself from over current. The drive contains capacitors that keep it powered up long enough to save the current run parameters. If power is restored during this process, approximately 20 seconds, the drive will not restart until completed.

For 30 minutes, then attempt to prime again. The “Max Priming Time” is set by the user on the priming menu as discussed in the manual. Once the pump has primed, the pump will attempt to start. If the pump fails to start, the pump will reset.


If the drive temperature gets above 54.4° C (130° F) the pump will slowly reduce speed until the over temperature condition clears.

When active, the motor will run at the preset RPM until the drive internal temperature increases above the minimum. The pump’s internal thermal protection is disabled when connected to an automation system. Thermal protection is provided by selecting YES at the ON WITH FREEZE portion of the circuit function menu in the IntelliTouch® Control System. To re-enable the internal thermal protection, the power to the drive must be cycled off then back on.


Indicated that the drive is overloaded or the motor has an electrical problem. The drive will restart 20 seconds after the over current condition clears.

Indicates excessive supply voltage or an external water source is causing the pump and motor to rotate thereby generating an excessive voltage on the drives internal DC buss. The drive will restart 20 seconds after the over voltage condition clears.


Indicates that the self-monitoring motor control software has encountered an error. Clear the alarm and restart the pump. If this alarm persists, contact Pentair Technical Service at 1-800-831-7133.


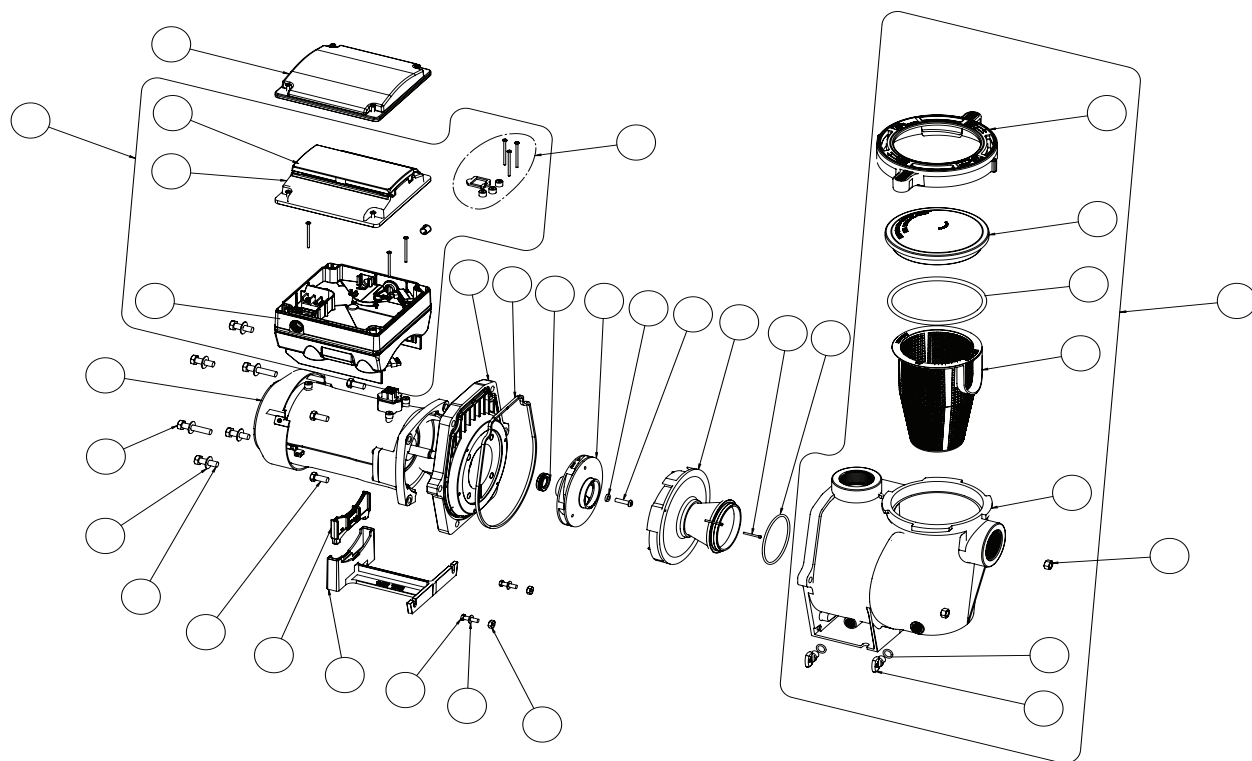
[illegible]


INTELLIFLO® Variable Speed Pump Installation and User's Guide

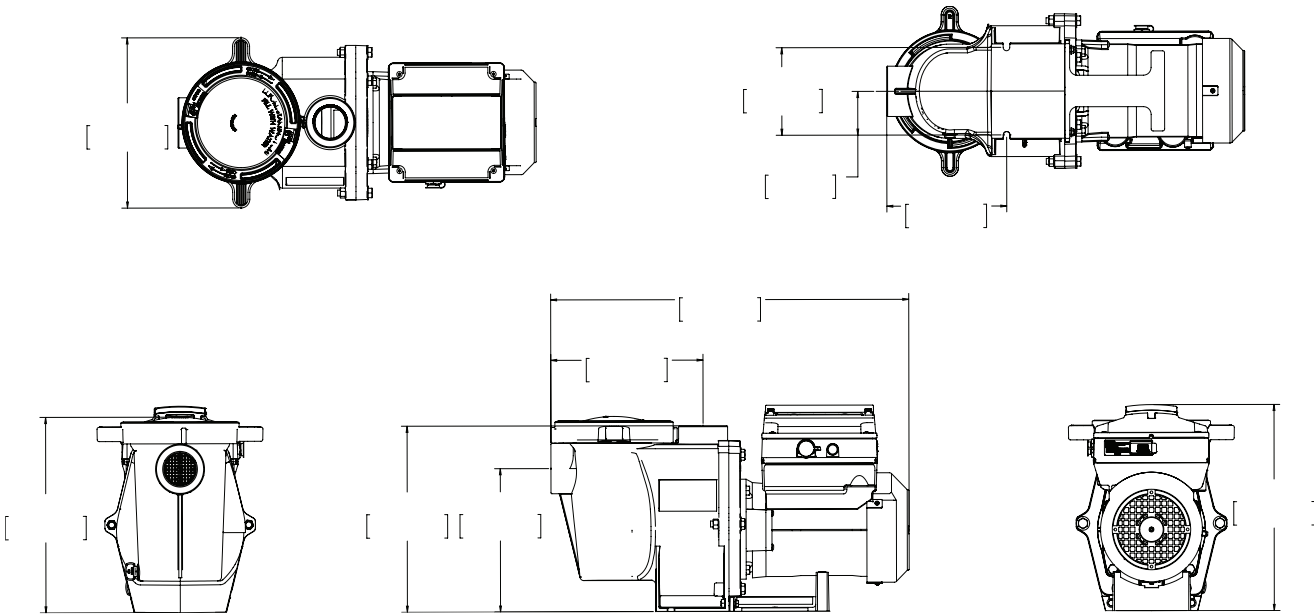

Circuit Protection: Two-pole 20 AMP device at the Electrical Panel.
Input: 208-230 VAC, 50/60 Hz, 3200 Watts Maximum, 1 phase

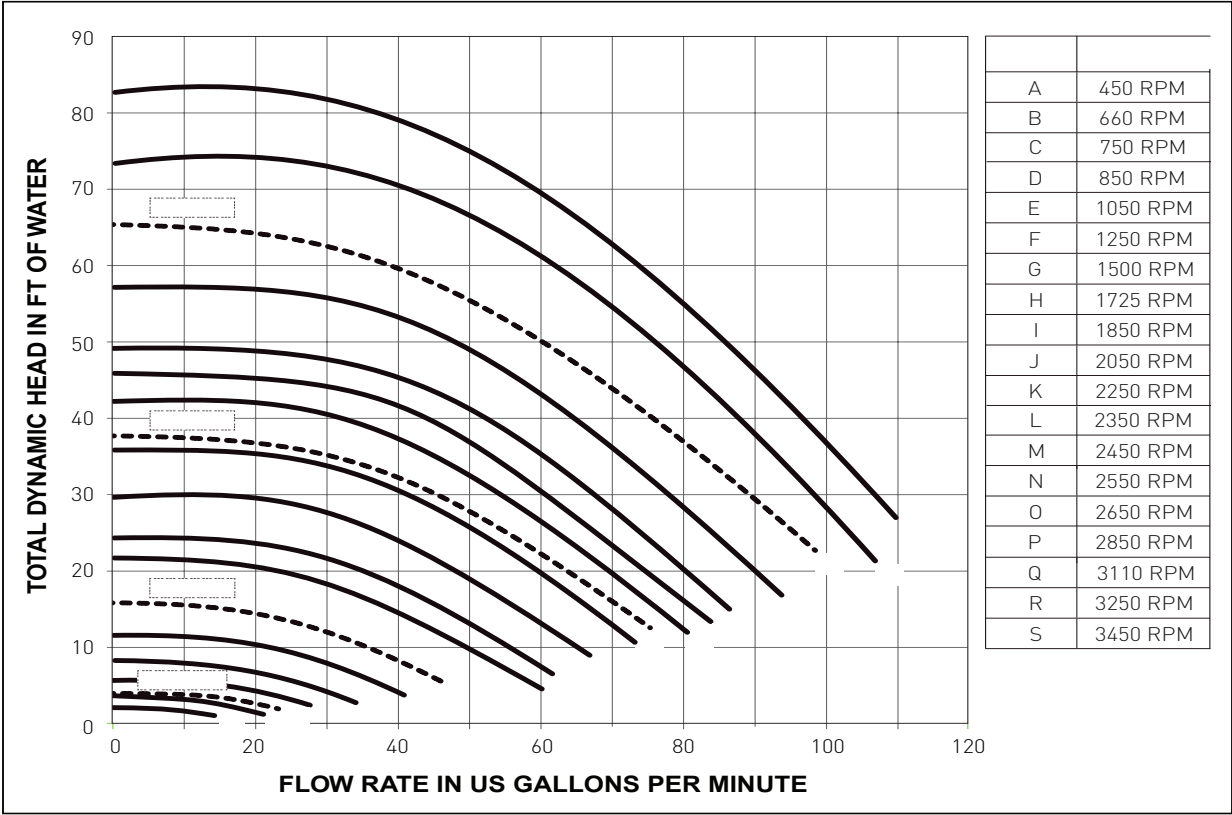

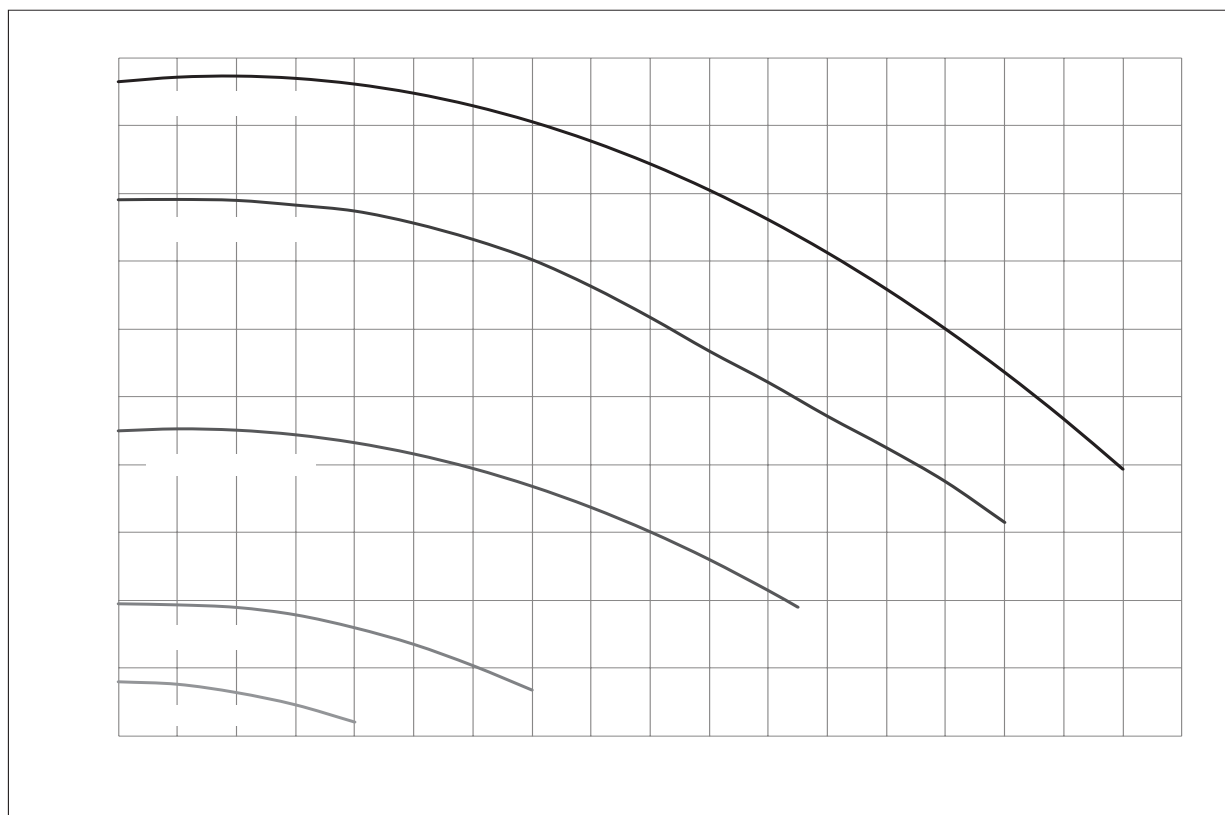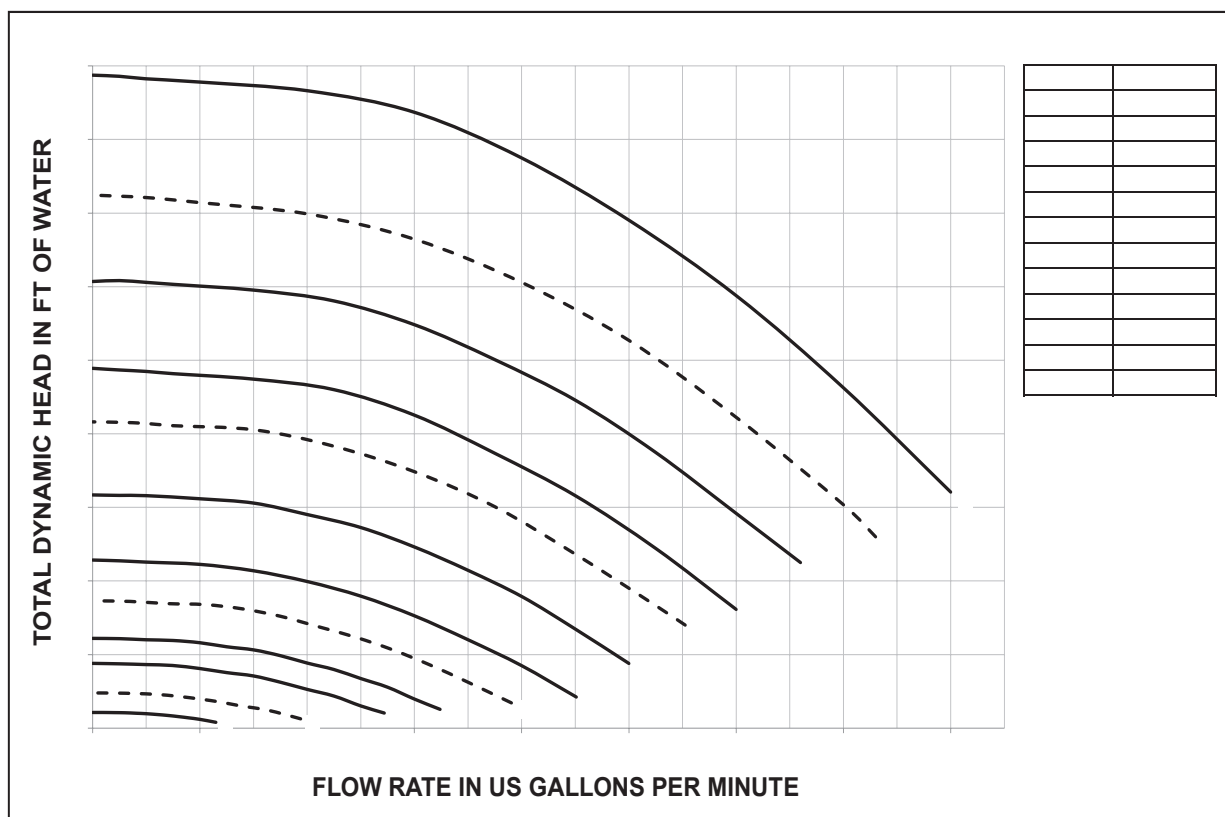

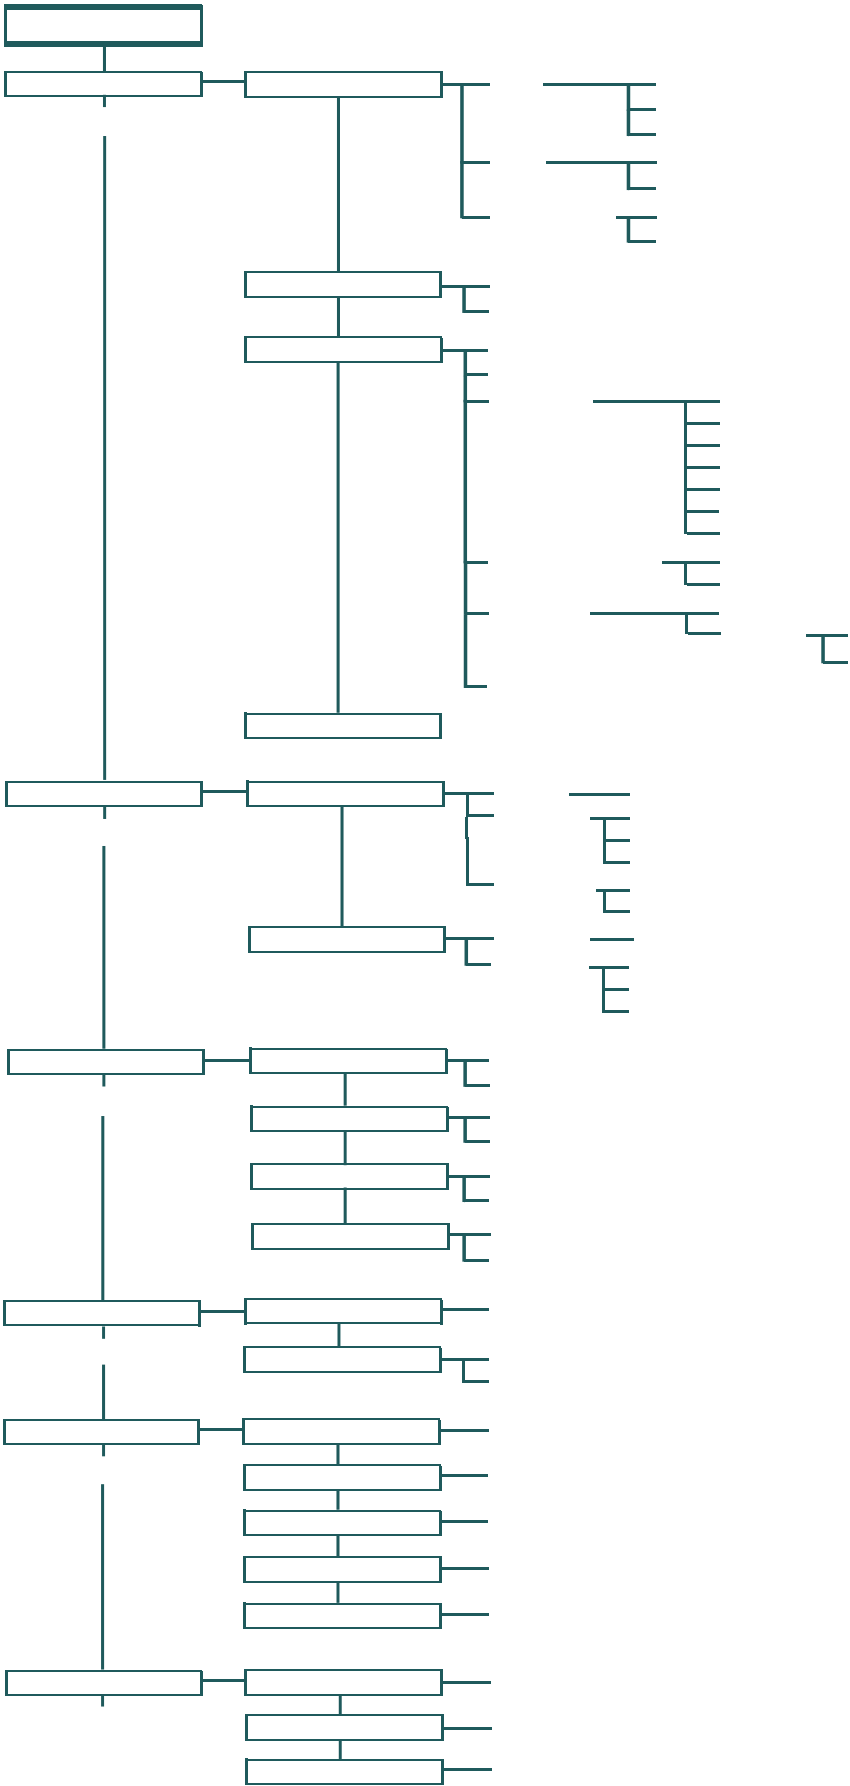



1620 HAWKINS AVE., SANFORD, NC 27330 • (919) 566-8000
10951 WEST LOS ANGELES AVE., MOORPARK, CA 93021 • (805) 553-5000
WWW.PENTAIRPOOL.COM

All Pentair trademarks and logos are owned by Pentair or one of its global affiliates. Pentair Aquatic Systems®, IntelliFlo®, IntelliComm®, EasyTouch®, IntelliTouch®, SunTouch® and Eco Select® are trademarks and/or registered trademarks of Pentair Water Pool and Spa, Inc. and/or its affiliated companies in the United States and/or other countries. Unless expressly noted, names and brands of third parties that may be used in this document are not used to indicate an affiliation or endorsement between the owners of these names and brands and Pentair Water Pool and Spa, Inc. Those names and brands may be the trademarks or registered trademarks of those third parties. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

© 2016 Pentair Water Pool and Spa, Inc. All rights reserved. This document is subject to change without notice.