




Economy Filter Cartridges



EFP Series

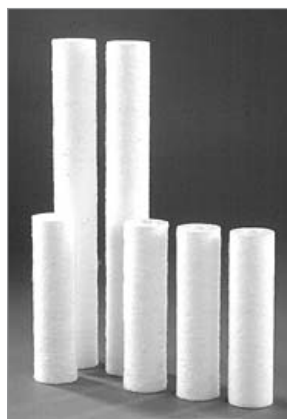

ANSI / NSF
STANDARD 42
COMPONENT
CERTIFIED



EFP Series Melt Blown Polypropylene Filter Cartridge Features:

- Melt blown polypropylene for purity and chemical compatibility.
- Ideal for aggressive chemicals and general sediment filtration when depth filtration is required.
- Max Flow rate 2-8 gpm based on micron.
- Contains no binders, agents, solvents, antistatic materials or wetting agents.
- Meets FDA requirements for food and beverage contact.
- No leachables or extractables to contaminate.
- No surface binders to reduce flow & increase change-out frequency.
- Rated for temperatures up to 140° F
- Shrink wrapped for purity.

Part Number	Micron	O.D.	Length	Ctn Qty	List Price
MELT BLOWN POLYPROPYLENE Filter cartridges for SLIM and STANDARD style housings					
EFP1	1	2 1/2"	9 7/8"	48	\$ 5.30
EFP5	5	2 1/2"	9 7/8"	48	4.32
EFP20	20	2 1/2"	9 7/8"	48	4.32
EFP50	50	2 1/2"	9 7/8"	48	4.32
MELT BLOWN POLYPROPYLENE Filter cartridges for LARGE DIAMETER style housings					
EFPBB1	1	4 1/2"	9 3/4"	24	32.72
EFPBB5	5	4 1/2"	9 3/4"	24	27.60
EFPBB20	20	4 1/2"	9 3/4"	24	27.60
EFPBB50	50	4 1/2"	9 3/4"	24	27.60
EFPBB1-20	1	4 1/2"	20"	12	72.08
EFPBB5-20	5	4 1/2"	20"	12	50.37
EFPBB20-20	20	4 1/2"	20"	12	53.95
EFPBB50-20	50	4 1/2"	20"	12	50.28



EFP_G Series

EFP-G Series Grooved Melt Blown Polypropylene Filter Cartridge Features:

- Grooved cartridges for increased surface area and greater dirt handling capacity.
- Melt blown polypropylene.
- Maximum temperatures 140° F
- Maximum pressure: 40 psid
- Recommended change out 30 psid.
- Maximum flow rate 2-8 gpm based on micron.
- Shrink wrapped for purity.
- Fits slim and standard style housings.



Part Number	Micron	OD	Length	Ctn Qty	List Price
EFP5G	5	2 1/2"	9 3/4"	48	\$ 6.02
EFP20G	20	2 1/2"	9 3/4"	48	6.02
EFP1G-20	1	2 1/2"	20"	24	18.03
EFP5G-20	5	2 1/2"	20"	24	12.15