


NAMEPLATE DATA

MODEL: 184980
 CUST. P/N: B227SE
 HP: 3/4
 SF: 1.0
 ROT: CCWPE
 RPM: 3450
 TYPE: CX
 CODE: F
 FRAME: M 56 J
 VOLTS: 230/115
 AMPS: 4.4/8.8
 MAX AMPS:
 PH: 1
 HZ: 60
 INS: B
 AMB: 50
 DUTY: CONT

THERMALLY PROTECTED

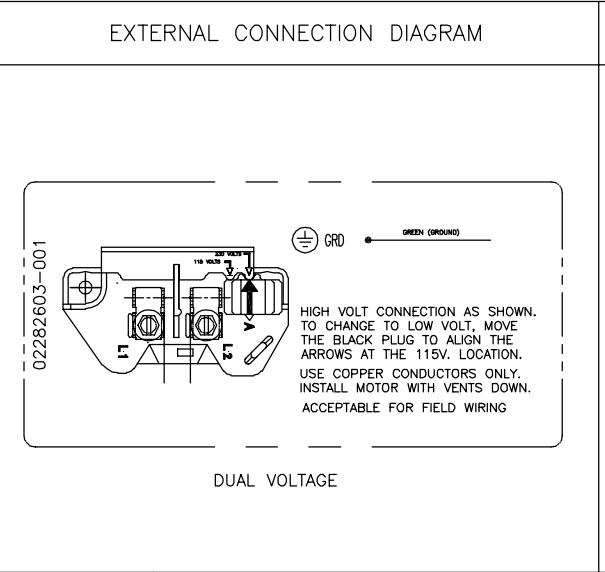

- NOTES:**
1. SHAFT RUNOUT NOT TO EXCEED .002 [.05] .
 2. FOR THREADED SHAFT EXT. MATING PARTS SHOULD BE RELIEVED ONE THREAD TO CLEAR FILLET.
 3. FOR THREADED SHAFT EXT.ECCENTRICITY OF THREADED PORTION OF SHAFT IS HELD WITHIN .004 [.10] TOTAL GAGE READING WITH THE INDICATOR ON O.D. OF GROUND RING GAGE AS SHOWN. THE GAGE BEING STATIONARY WITH RESPECT TO THE ROTOR.
 4. END PLAY NOT TO EXCEED .010 [.25] MEASURED WITH NO THRUST.

PERFORMANCE CURVE		APPROVED SAMPLE	
16345012		--	
UL COMPONENT		CSA	
FILE#	CCN#	FILE#	GUIDE#
E14663	XEWRZ	LR4642	4211-01
CUSTOMER	DISTRIBUTION		

DRAWING REVISION D	REVISION BY D.VALENCIANO	DATE 06-04-2015	TOLERANCES UNLESS OTHERWISE SPECIFIED DEC. INCH mm ANGLE
ECO ECO-0078956	APPROVED BY D.VALENCIANO	DATE 06-04-2015	.X ±0.1 [±2.5] ±0.5° .XX ±0.02 [±0.51] .XXX ±0.005 [±0.127] .XXXX ±0.0005 [±0.0127]
ECO DESCRIPTION SEE ECO			REMOVE BURRS & BREAK SHARP EDGES .003/.015 [0.076/.381] CORNER FILLETS .02 [1.51] MACHINED SURFACES .125/3.2 mm SHOWN IN [BRACKETS]

DRAWN BY: TZ	DATE: 09-29-2010	Regal Beloit America, Inc.
APPROVED BY: CZ	DATE: 09-29-2010	
REFERENCE	MATERIAL	DESCRIPTION MODEL-CFHP-56FR OUTLINE
THIRD ANGLE PROJECTION	SIZE DWG NO C B227SE	PROCESS/FINISH SHEET 1