MODEL <mark>S90</mark>

High Performance, Medium Head Swimming Pool Pump

Features

- This high performance, medium head pump comes complete with our unique mechanical shaft seal that allows the pump, if mistreated, to run dry for up to one hour.
- The pump can be used for pool water with a salt concentration of up to 5000 ppm.
- Pump parts are made of 100% recyclable plastic. Non-corrosive, chemical/UV resistant, and can withstand temperatures of up to 175°F.
- All models are equipped with quick disconnect unions for easy installation and maintenance.
- For pool users' safety, the impeller has a dielectric shaft sleeve that provides absolute separation between pool water and electric parts.
- Lock ring that incorporates handles. These handles provide the user with a convenient way to easily remove the lid.
- Heavy duty "1081" pool motor with large 56 frame motor is thermally protected, has a PSC switchless design and extra large sealed ball bearings.
- Available with E-plus[®]/extreme-E[™] energy efficient motors for extra low energy consumption.
- Motor is easy to remove without disturbing the plumbing. Reusable o-rings throughout.
- Every pump is performance tested before leaving the Speck factory.



Trademarks and Certifications





CONFORMS TO NSF/ANSI Std. 50

Applications

- In-ground pools
- Residential and small commercial pools


Dimensional Drawing





| MODEL | DIMENSION "L" | SHIPPING WEIGHT |
|---------|------------------|--------------------|
| S90-I | 25.0" | 34 lbs. |
| S90-II | 25.0" | 35 lbs. |
| S90-III | 25.8" | 37 lbs. |
| S90-IV | 26.5" | 44 lbs. |

Performance Curves

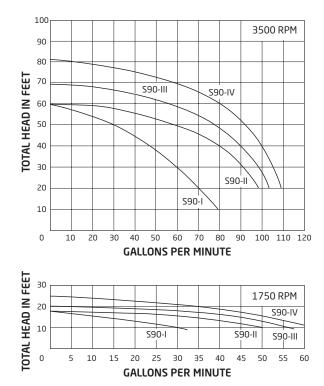

8125 Bayberry Road, Jacksonville, Florida 32256 USA | Phone: (904) 739-2626 | Fax: (904) 737-5261 Website: www.speck-pumps.com

SPECK X